


**NISKLAN03 without bracket, cable length 250mm
(P/N: 10JKLAN0300X0)**

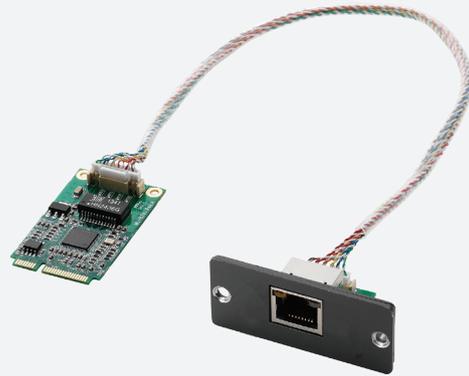

**NISKLAN03 with universal I/O bracket, cable length 250mm
(P/N: 10JKLAN0301X0)**

Main Features

- mini-PCIe form factor
- Easy and user-friendly configurations
- One RJ45 Ethernet interface

Product Overview

NISKLAN03 with universal I/O bracket is specifically designed with NISE/NIFE models for network connectivity expansions. It provides one Intel® Gigabit Ethernet ports with I210AT controller, which gives great network connectivity. The LAN Port supports WOL, PXE and teaming functions for managing network activities.

Specifications

Form Factor

- mini-PCIe form factor

Chipset

- Intel® Ethernet controller I210AT
- Compliant with IEEE802.3, 802.3u, and 802.ab

Transfer Rate

- Support 10/100/1000 Mbps transfer rates

Functions

- Support WoL, PXE and teaming functions

Dimensions

- 30mm (W) x 51mm (L)

LAN LED Definitions

LAN Speed	Activity LED	Link Type LED
10/100 Mbps	Orange (left, flashing)	Orange (right, permanent)
1000 Mbps (gigabit)	Orange(left, flashing)	Green (right, permanent)

Environment

- Environment operating temperature: 0°C to 70°C
- Storage temperature: -20°C to 75°C

OS Support

- Windows 7 32-bit and 64-bit
- Windows 8 32-bit and 64-bit

Ordering Information

Barebone

- **NISKLAN03 universal kit (P/N: 10JKLAN0301X0)**
mini-PCIe to one GbE LAN module w/ universal bracket
(cable length: 25cm, LAN controller: I210AT)
- **NISKLAN03 kit (P/N: 10JKLAN0300X0)**
mini-PCIe to one GbE LAN module w/o bracket
(cablelength: 25cm, LAN controller: I210AT)