

OPPC 1530T

15" TFT XGA 4:3 Fanless Open Frame PC with Intel® Atom™ D2550,
1.86GHz, Touch Screen, 2GB DDR3, 4 x USB, 2 x COM and VGA



Main Features

- 4:3 15" XGA Fanless LED Panel Computer
- Intel® Atom™ D2550, Dual Core, Low Consumption CPU
- Dual GbE/2nd Display-VGA and HDMI/Line-in/Line-out/MIC-in
- 4 x USB/2 x Mini-PCIe sockets/1 x CFAST/2 x RS232/422/485
- DDR3 2GB/2.5" HDD Bracket
- Optional 3.5G/Wi-Fi Module/2.5" HDD/Panel Mount Kit
- Open Frame and Panel Mount/VESA Mount Compliance
- Wide Range Power Input 12V~30VDC

Product Overview

OPPC 1530T fanless Panel PCs are powered by Intel® Atom™ D2550 processor with Intel® NM10 Express chipset and support for DDR3 memory. OPPC 1530T incorporates a 15" 4:3 touch screen LCD panel with resolutions up to 1024 x 768 (XGA) and 400 nits brightness. It is specially designed with bezel-less display which allows customers to design front bezel according to their application requirements without any limitation.

OPPC 1530T is designed to meet the requirements of vertical market segments, such as Kiosk, ATMs, and vending machines. Customers also benefit from various mounting options, including open frame mount from both rear and front sides, VESA mount, wall mount and panel mount. This versatility gives users a quick route to market for a customized Panel PC.

Specifications

Panel

- LCD Size: 15", 4:3
- Resolution: XGA 1024 x 768
- Luminance: 400cd/m²
- Contrast ratio: 700
- LCD color: 16.2M
- Viewing Angle: 60(U), 80(D), 80(L), 80(R)
- Backlight: LED

Touch

- 5-wire resistive
- Light transmission: 81%
- Interface: USB

System

- CPU: On-board Intel® Atom™ Dual Core processor D2550, 1.86GHz, 1M L2 Cache
- BIOS: AMI BIOS
- System chipset: Intel® NM10 Express chipset
- System memory: 2 x 204-pin DDR3 SO-DIMM socket, 2GB DDR3 (Default), Support up to 4GB DDR3-800/1066, Non-ECC and Un-buffered
- Storage Device:
 - 1 x external locked CFAST socket
 - 1 x hard drive bay: optional 1 x 2.5" SATA HDD or 1 x SATA DOM
- Watchdog timer: Watchdog timeout can be programmable by

software from 1 second to 255 seconds and from 1 minute to 255 minutes (Tolerance 15% under room temperature 25°C)

- H/W status monitor: Monitoring system temperature, and voltage
- Expansion: 2 x Mini-PCIe sockets (support optional Wi-Fi or 3.5G module)

Rear I/O

- COM #1: RS232/422/485 w/ RI or 5V selection
- COM #2: RS232/422/485 w/ RI or 12V selection
- Ethernet: 2 x RJ45
- 2nd display port: VGA (1 x DB15) and HDMI
- Audio port: 1 x Line-out; 1 x Line-in; 1 x MIC-in
- USB: 4 x USB2.0
- Power switch
- Reset button

Audio

- AC97 codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in/MIC-in Audio Jack


Ethernet

- LAN chip: dual Intel® 82574L Gigabit LAN
- Ethernet interface: 10/100/1000 Based-Tx Ethernet compatible

Mechanical & Environment

- Front panel open frame
- Mounting:

Dimension Drawing

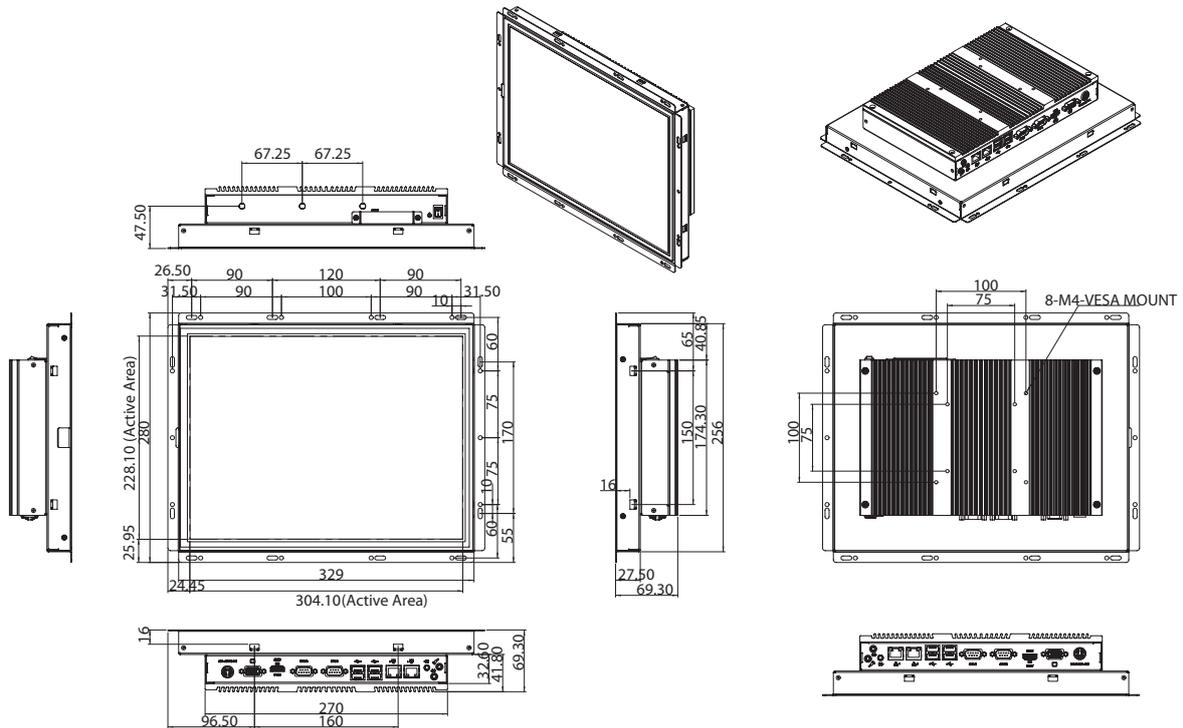

Open frame mount

Panel/wall/stand/VESA 75 x 75; 100mm x 100mm

Power input: 12V~ 30VDC

Power adapter: Optional AC to DC power adaptor (+12V, 60W)

- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 0.5Grms @ sine, 5~500Hz, 1hr/axis (HDD Operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (Non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -5°C to 50°C
- Storage temperature: -20°C to 75°C
- Operating humidity:
 - 10%~90% relative humidity, non-condensing
 - Limits to be at 90% RH at max 30°C
 - Limits to be at 70% RH at max 50°C
- Dimension: 329 x 280 x 69.3 mm
- Weight: 4 Kg

Certifications

- CE approval
- FCC Class A

Ordering Information

Barebone

- **OPPC 1530T (P/N: 90IQ1530T00X0)**
15" TFT LED Backlight Open Frame PC with Intel® Atom™ D2550
1.86GHz, touch screen, 2GB DDR3, COM#1/#2

Options

- **12V, 60W AC/DC power adapter w/o power cord**
(P/N: 7400060017X00)