



## Main Features

- Built-in Intel® Atom™ D525 Dual Core 1.8GHz processor
- Fanless and rugged design
- 1 x M12 LAN port
- 1 x external CF socket and one external SIM card holder
- DC power input with 500V isolated protection
- Support ignition signal for delay-time control
- Support WoL & PXE function
- Certified by EN50155

## Product Overview

nROK 500 fanless computer with EN50155 certified is specially designed for transportation computing solution especially in railway related applications. Based on Intel® Atom™ D525 processor, nROK 500 is designed with isolated DC input protection to ensure stable operation in harsh environments. Adopting lock concept, all connectors, for example M12 Ethernet connector, on nROK 500 are designed against vibration. Equipped with a SIM card holder, CF socket and mini-PCIe socket for optional 3G wireless module, nROK 500 allows data to be transmitted over network and stored in a convenient SSD (Solid-State Drive) or CF card for better vibration and shock protection. EN50155 certified nROK 500 is a reliable accredited solution for railway applications.

## Specifications

### CPU

- Intel® Atom™ D525 Dual Core 1.8GHz

### Main Chipset

- Intel® ICH8M chipsets

### Memory

- 2GB DDR2 667MHz SODIMM (up to 2GB)

### Storage

- CF Card socket: External accessible type, screwed with CF card cover
- 1 x 2.5" SSD drive bay

### Expansion


- 1 x Mini-PCIe socket (for 3.5G module option)

### I/O Interface-Front

- 1 x VGA Output  
DB15 x 1, support analog monitor with pixel resolution up to 2048 x 1536@75 Hz
- 2 x RS-232 COM Port  
DB9 x 2, support 115.2 Kbps baud rate
- 2 x USB Port  
2 x USB 2.0 ports, 500mA per port, covered with plastic cover to against the dust
- 1 x Mic-in & 1 x Speaker-out

- Audio controller: High definition audio controller, Realtek: ALC888-GR
- 1 x Speaker-out, Dia. 3.5mm phone jack, covered with plastic cover to against the dust
- 1 x Mic-in, Dia. 3.5mm phone jack, covered with plastic cover to against the dust
- 1 x 10/ 100 M12 LAN Port
- LAN Controller: Intel® WG82574L LAN controller x 1
- Support wake on LAN and boot from LAN function
- Wireless communication
  - 1 x External accessible SIM card socket
  - 1 x Mic-in for wireless communication use
  - 1 x Speaker-out for wireless communication use
  - 2 x Antenna holes (for 3G/ 3.5G mobile wireless module)
- LEDs
  - 1 x LED for power status
  - 1 x LED for HDD status
  - 1 x LED for 10/ 100 LAN link
  - 1 x LED for 10/ 100 LAN active
- DC Input
  - Nominal Voltage: 24V (Range: 16.8V ~ 30V)
  - Ignition signal input (24V, nominal; 0~10.5V = off, rest = on)
  - 500V Isolated design on DC Input
  - 1 x External fuse

## Dimension Drawing

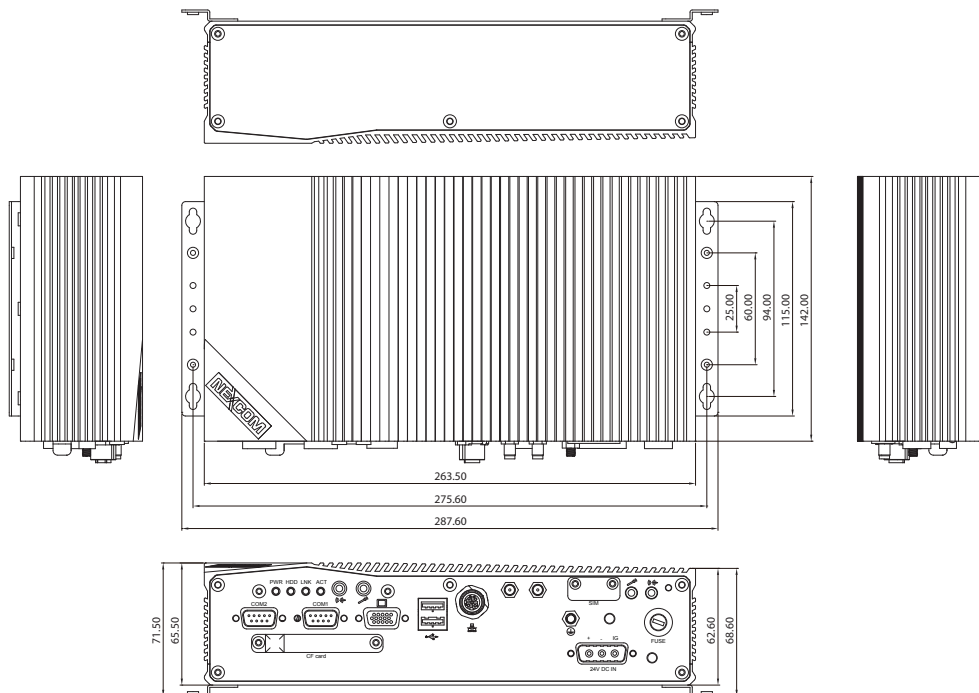

### Operating System

- Windows Embedded Standard 2009
- Windows Embedded Standard 7

### System Dimension

- 264mm (W) x 142mm (D) x 65.5mm (H)

### Environment

- Operating temperature
  - Ambient with air: -25°C to 55°C (EN50155 Class T1)
- Storage temperature: -40°C to 80°C
- Damp heat test: 95% at 55 °C, compliance with EN50155
- Relative humidity: 0% to 90% (non-condensing)
- Vibration (Random): Compliance with EN61373 Category 1, Class B
- Shock: Compliance with EN61373 Category 1, Class B

### Ingress Protection

- IP52

### Certifications

- CE
- EN50155

## Ordering Information

- **nROK 500 (P/N: 10A00050000X0)**

Intel® Atom™ D525 1.8GHz Fanless Railway Computer with 2G memory pre-installed and Isolated 24VDC Input