



## Main Features

- OnBoard Intel® Atom™ Dual Core D525 (1.8GHz, 1M Cache) processor
- One DDR3 SO-DIMM socket, DDR3 800 4G memory module support max.
- Dual Intel® 1000/100/10 Mbps LAN ports; Support WoL & LAN teaming
- 4 x USB 2.0, 1 x VGA
- 4 x RS232 and 2 x RS232/422/485 with auto flow control
- 1 x DB15 GPIO connector
- 1 x external CF Socket and one external SIM card holder
- +9 to 36VDC input; Support ATX power mode
- 1 x PCI Expansion Slot

## Product Overview

NISE 2100 series are based on the cutting edge technology of the Intel® Atom™ Dual Core D525 processor. With Atom™ Dual Core D525 CPU, DDR3 667/800 SO-DIMM and multiple I/O ports, NISE 2100 series can be utilized within industrial automation, self-service machines like KIOSK check-in machines, recycling machines as well as factory automation etc. Other features of this versatile series include three Intel® Gigabit LAN ports, four RS232 COM ports, two RS232/422/485 COM ports, four USB 2.0, one VGA port, one GPIO port, and one speaker out. In terms of storage, SATA HDD/SSD or front accessible CF card are available for deployment. The NISE 2100 Series has a wide DC input range which varies from +9V to 36V and is therefore designed to meet most application requirements.

## Specifications

### Main Board

- NISB 2100A
- OnBoard Intel® Atom™ D525 Dual Core processor, 1.8GHz, 1M Cache
- Intel® ICH8M PCH

### Main Memory

- 1 x DDR3 SO-DIMM socket, support up to 4GB DDR3 800 SDRAM memory module, unbuffered and non-ECC

### Expansion

- 1 x PCI expansion
- PCI card: Max. 176mm in length
- 1 x Mini-PCIe  
Default: support optional Wi-Fi module  
Option: support optional 3.5G module

### I/O Interface-Front

- ATX Power on/off switch
- HDD Access/Power status LEDs
- 2 x USB 2.0 ports
- 2 x Serial port (RS232)
- 1 x external SIM card holder
- 1 x DB15 GPIO connector
- 2 x antenna holes

### I/O Interface-Rear

- +9 to 36VDC input
- 1 x 3-pin for remote power on/off switch
- 1 x DB15 VGA port
- 2 x Intel® 82574L GbE LAN ports (Support WoL & LAN Teaming)
- 1 x Speaker out
- 2 x USB 2.0 ports
- 4 x Serial port (2 x RS232 and 2 x RS232/422/485 with auto-flow control, isolation protection on COM1 & COM2)

### Storage

- 1 x 2.5" SATA HDD drive bay or optional SATA DOM module (horizontal type)
- 1 x external CF socket

### Power Requirements

- ATX Power mode
- DC to DC power design onBoard, support from +9 to 36VDC input
- Optional 19V, 65W power adapter


### Dimensions

- 195mm (W) x 200mm (D) x 90mm (H) (7.7" x 7.9" x 3.5")

### Construction

- Aluminum Chassis with fanless design

## Dimension Drawing

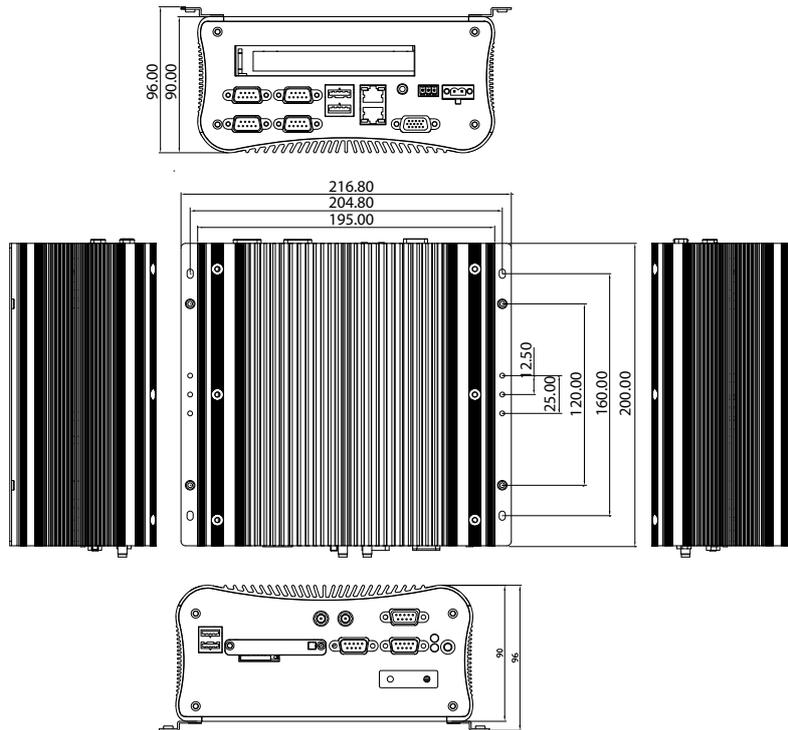

### Environment

- Operating temperature:  
Ambient with air flow: -20°C to 70°C (with industrial grade devices)  
(According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C to 80°C
- Relative humidity: 10% to 93% (non-condensing)
- Shock protection:
  - HDD: 20G, half sine, 11ms, IEC60068-2-27
  - CF: 50G, half sine, 11ms, IEC60068-2-27
- Vibration protection w/ HDD Condition
  - Random: 0.5Grms @ 5 ~ 500Hz according to IEC60068-2-64
  - Sinusoidal: 0.5Grms @ 5 ~ 500Hz according to IEC60068-2-6

### Certifications

- CE approval
- FCC Class A
- e13

### OS Support List

- Windows XP 32bits and 64bits
- Windows 7 32bits
- WinCE 6.0

## Ordering Information

### Barebone

- **NISE 2110A (P/N: 10J00211001X0)**  
Intel® Atom™ D525 fanless barebone system with DDR3 SO-DIMM socket and one PCI expansion
- **19V 65W AC/DC power adapter w/ o power cord (P/N: 7400065009X00)**