

MTK 10-DTC

MRC 1X00 Desktop Docking Station



Main Features

- ◆ Support Multiple IO Interface
- ◆ Support One Charge Bay for Second Battery Pack

Specifications

I/O Ports

- ◆ 4 x USB 2.0 Ports
- ◆ 1 x RJ45 with LEDs for 10/100/1000Mbps Ethernet
- ◆ 1 x DB15 VGA
- ◆ 1 x 32-pin PoGo connector

Power Input

- ◆ Power Input Voltage : DC 19V/6.32A
- ◆ Battery Charger :
 - Enable charging MRC1000 and additional secondary battery pack (3S3P) at the same time
 - Support 1 slot battery charging

Indication LED

- ◆ Power on LED Blue
- ◆ LAN Link LED Green
- ◆ LAN Access LED Yellow
- ◆ Battery status LED
 - charging : Yellow
 - Full charge : Turn Off
 - Battery fault : Red

Dimension

- ◆ 230mm x 173mm x 119mm
- ◆ Weight : 1.05Kg

Construction

- ◆ Plastic ABS+PC
- ◆ Metal SECC for I/O pane

Environment

- ◆ Normal Charger temperature : 10°C to 40°C
- ◆ Operating temperature : -20°C to 50°C
- ◆ Storage temperature : -30°C to 60°C
- ◆ Relative humidity : 5% to 95% non-condensing

Certifications


- ◆ CE approval
- ◆ FCC class B

Ordering Information

- ◆ **MTK 10-DTC (P/N : 10UK10DTC00X0)**
Desktop docking station with USB/Giga Ethernet

◆ Optional Accessories

Part No.	Description
4ZTSA12901X00	Secondary Battery Pack for 6 hours
4ZTSA18901X00	Secondary Battery Pack for 8 hours

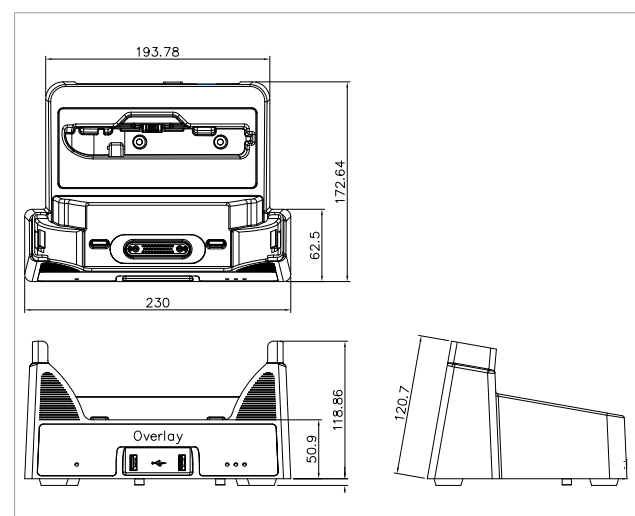

www.nexcom.com



NEXCOM

Rugged Tablet Computer

We reserve the right to change specifications and product descriptions at any time without prior notice.

Last update: 03/20/2014