# Neu-X1025-N97





# **Main Features**

- Intel® processor N97
- Slim compact chassis and fanless design
- 1 x DDR5 4800 SO-DIMM, up to 16GB
- Support 2 x HDMI® 2.0 output, 4K@30Hz
- TPM 2.0 design for security

- Rich I/O connectivity: 2 x 2.5GbE LAN, 4 x USB 3.2 Gen 2
- 1 x M.2 Key M 2242 for supporting PCIe & SATA storage device
- 1 x Mini PCIe slot, supports a Wi-Fi/LTE module
- · Support DC 12V power input

# **Product Overview**

The Neu-X1025-N97 is powered by the Intel® processor N97, featuring upgraded computing performance, low power consumption, and integrating a rich set of IoT features. It supports dual HDMI® 2.0 display outputs, dual 2.5GbE LAN ports, four USB 3.2 Gen 2 ports, an RS-232/422/485 port and an M.2 Key M 2242 storage slot that supports PCIe and SATA format. In addition, the Mini PCIe slot supports an LTE or Wi-Fi 6/6E module. With LTE and Wi-Fi communication, the Neu-X1025-N97 provides wide-area coverage and real-time transmission for gateway applications.

With its slim, compact, fanless design and extended durability, it is well-suited for a wide range of applications, including IoT gateways, self-service kiosks, endless aisles, QSRs, drive-thru kiosks, bus stops, digital transit information signs, intelligent poles/lighting systems, and information display systems such as PIDS for smart cities.

# **Specifications**

#### Processor

• Intel® processor N97, TDP 12W

#### **Integrated Graphics**

• Intel® UHD Graphics

#### Memory

• 1 x DDR5 4800 SO-DIMM, non-ECC, unbuffered, up to 16GB

# I/O Interface Front

- 2 x Antenna hole
- 1 x COM port, supports RS-232/422/485
- 1 x Storage active LED

#### I/O Interface Rear

- 2 x 2.5GbE RJ45 port with LEDs
- 2 x HDMI® 2.0, up to 3840x2160@30Hz
- 4 x USB 3.2 Gen 2
- 1 x Power button with LED
- 1 x DC-in jack with lock

#### I/O Interface Internal

- 1 x 9-pin header for COM (RS-232, RI/5V/12V)
- 1 x 9-pin header for audio line out
- 2 x 6-pin header for three USB 2.0 ports
- 1 x 10-pin header for GPIO, 4 x GPI, 4 x GPO

#### **Expansion Slot**

- 1 x Full-size Mini PCIe slot
  - Support a Wi-Fi 6/6E or LTE module
- 1 x nano-SIM slot

### Storage

• 1 x M.2 Key M 2242 SSD (PCIe 3.0 x1, SATA 3.0)


#### **Power Supply**

- DC +12V power input
- AC/DC +12V, 60W power adapter in carton

#### **Environment**

- Temperature:
  - Ambient temperature with 0.7m/s air flow: -5°C~50°C
  - Storage temperature: -20°C~80°C
- Humidity: 95% (non-condensing)



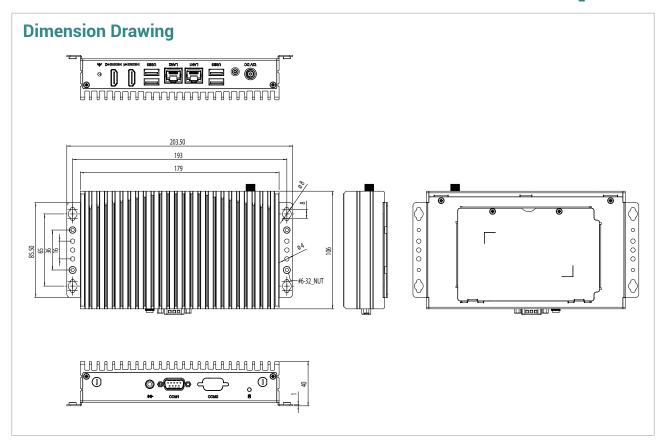

- Shock protection: 50G peak acceleration, 11ms according to IEC 60068-2-27
- Vibration protection
  - Random: 2Grms@5Hz~500Hz, IEC 60068-2-64
  - Sinusoidal: 2G@5Hz~500Hz, IEC 60068-2-6

# Mechanical

- Dimensions: 203.5mm (W) x 106mm (D) x 40mm (H)
- Weight: 0.88kg

## **Package Information**

- Dimensions: 296mm (W) x 276mm (D) x 205mm (H)
- Gross Weight: 3.2kg (2 units per carton)

# Certifications

- CE (EN 55035 + EN 55032)
- FCC Class A (EMI Part 15B)
- LVD (EN 62368-1)
- UL/CUL (62368-1)

#### **Operating System**

- Windows 11
- Windows 10, 64-bit
- Linux

# **Ordering Information**

• Neu-X1025-N97 (P/N: 10W10X10214X0)

Intel® processor N97, slim and fanless system