



## Main Features

- Support Intel® Core™ 2 Duo/Celeron® processor
- Intel® GM45 chipsets
- Dual Intel® 82574L Gigabit Ethernet ports; Support WoL, teaming and PXE
- Dual VGA or VGA/DVI Independent Display
- 3 x RS232 and 1 x RS232/422/485 with Auto Direction Control
- One external locked CF socket
- OnBoard DC to DC power design to support +16 to 30VDC power input; Support ATX power mode

## Product Overview

Utilizing the Intel® GM45 chipsets, NISE 3140 is highly scalable supporting a wide variety of Intel® Core™ 2 Duo and Celeron® processors. Using the Intel® graphics media accelerator 4500MHD, the rugged NISE 3140 delivers exceptional graphics performance with notable rates of data transfer.

NISE 3140 provides a number of important features required by image processing operation, including dual-channel DDR3 memory, two Gigabit Ethernet LANs, auto-direction control on RS485 interface. On top of that, NISE 3140 supports dual independent displays through 2 x VGA, DVI or LVDS outputs. Housed in a robust aluminum chassis, NISE 3140 of fanless design offers noise-free, ultra reliable operating in the most demanding of industrial environment.

The NISE 3140 series is an idea system for industrial automation, machine automation, Automated Optical Inspection (AOI), visual inspection, video surveillance, image mapping and face recognition markets.

## Specifications

### Main Board

- NISB 3140
- Support Intel® Core™ 2 Duo Processor P8400 (3M Cache, 2.26 GHz, 1066 MHz FSB)
- Support Intel® Celeron® Processor 575 (1M Cache, 2.00 GHz, 667 MHz FSB)

### Main Memory

- 2 x 240-pin DIMM, up to 4GB DDR3 800/1066 MHz SDRAM, un-buffered and non-ECC

### Chipset

- Intel® GM45 Graphics and Memory Controller Hub
- Featuring the Mobile Intel® Graphics Media Accelerator 4500MHD
- Intel® 82801IBM (ICH9M) I/O Controller Hub

### I/O Interface-Front

- ATX power on/off switch
- HDD Access/Power status LEDs
- 1 x Front Access CF Card Socket
- 2 x USB2.0 ports

### I/O Interface-Rear

- 2-pin Remote Power on/off switch
- +16 to 30VDC input
- 1 x PS/2 for Keyboard/Mouse
- 1 x DB25 Parallel Port (Optional GPIO or LVDS interface)
- 1 x DB44 Serial Port for 4 x RS232 (COM2: RS232/422/485 with Auto Flow Control)
- 2 x GbE LAN ports (support WoL & LAN teaming)
- 4 x USB2.0 ports
- 1 x DB15 VGA port
- 1 x DVI-I Port (DVI-D + VGA)
- 1 x Line out and 1 x Mic-in


### Device

- 1 x 2.5" SATA HDD drive bay
- 1 x external locked CF card socket

### Expansion

- One PCI expansion (NISE 3140 only, 10W max./per slot)
- One PCIE1 expansion (NISE 3140E only, 10W max./per slot)
- Max. Support Add-on Card Length: 169mm

## Dimension Drawing

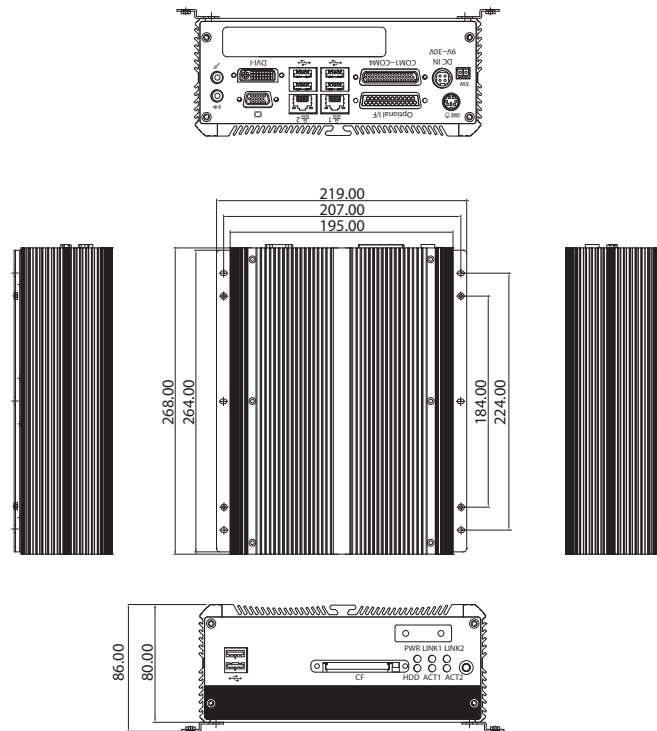

### Power Requirements

- ATX power mode
- OnBoard DC to DC power support from +16 to 30VDC
- Optional power adapter

### Dimensions

- 195mm (W) x 268mm (D) x 80mm (H) (7.7" x 10.5" x 3.1")

### Construction

- Aluminum Chassis with fanless design

### Environment

- Operating temperature:
  - Ambient with air flow: -5°C to 55°C
  - (According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C to 80°C
- Relative humidity: 10% to 93% (Non-Condensing)
- Shock protection:
  - HDD: 20G, half sine, 11ms, IEC60068-2-27
  - CF: 50G, half sine, 11ms, IEC60068-2-27
- Vibration protection w/HDD Condition
  - Random: 0.5Grms @ 5~500 Hz according to IEC60068-2-64
  - Sinusoidal: 0.5Grms @ 5~500 Hz according to IEC60068-2-6

### Certifications

- CE approval
- FCC Class B

### OS Support Lists

- Windows XP 32bits and 64bits
- Windows 7 32bits and 64bits

## Ordering Information

### Barebone

- **NISE 3140 (P/N: 10J00314000X0) RoHS Compliant**  
Intel® Core™ 2 Duo/Celeron® Fanless Bare-Bone system with one PCI Expansion
- **NISE 3140E (P/N: 10J00314001X0) RoHS Compliant**  
Intel® Core™ 2 Duo/Celeron® Fanless Bare-Bone system with one PCIe1 Expansion
- **19V, 120W AC/DC power adapter w/o power cord**  
**(P/N: 7410120002X00)**