

APPC 1750T

17" TFT SXGA 4:3 Flush Panel PC with Intel® Celeron® J3455 1.50GHz,
Touch Screen, 4GB DDR3L, 4 x USB, 3 x COM



Main Features

- 4:3 17" SXGA fanless LED panel computer
- Intel® Celeron® J3455 processors, low consumption CPU
- Flush panel by 5-wire touch screen
- 1 x DDR3L 1866MHz sockets, up to 8GB (non-ECC)
- Dual Intel® GbE LAN ports/DP/Dual USB 3.0 & USB 2.0
- 1 x mini-PCIe sockets, 1 x M.2, 1 x RS232/422/485
- DDR3L 4GB/2.5" HDD bracket
- IP65 compliant front panel
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- DC power input 24VDC

Product Overview

The 17" SXGA fanless panel PC APCC 1750T incorporating an industrial motherboard is intended for versatile industrial applications. APCC 1750T supports 1280 x 1024 (SXGA) resolution and 350-nit brightness. The front panel which adopts flush design and complies with IP65 standard makes it the perfect fit in industrial applications.

APCC 1750T supports LTE, WLAN communications via dual Gigabit Ethernet connectors and mini-PCIe slot. Several options are on storage devices like M.2 and 2.5" SSD. With support for DC power input of 24VDC, APCC 1750T can gain a strong foothold in industrial field and machine devices. In addition, APCC 1750T can hook 2nd display via a DP for dual independent display, with the 3 x COM ports option, will makes it a real intelligent system for various solutions.

Specifications

Panel

- LCD size: 17", 4:3
- Resolution: SXGA 1280 x 1024
- Luminance: 350cd/m²
- Contrast ratio: 800
- LCD color: 16.7M
- Viewing angle: 60 (U), 80 (D), 80 (L), 80 (R)
- Backlight: LED

Touch Screen

- 5-wire resistive (Flush panel type)
- Light transmission: 81%
- Interface: USB

System

- CPU: onboard Intel® Celeron® J3455 Quad Core processor, 1.50GHz
- BIOS: AMI BIOS
- System memory: 1 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 8GB DDR3L-1866, non-ECC and un-buffered
- Storage device
 - 1 x Internal M.2 2242
 - 1 x Hard drive bay: optional 1 x 2.5" SATA HDD
- Watchdog timer: Watchdog timeout can be programmable by

software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)

- Expansion : 1 x mini-PCIe sockets (support optional Wi-Fi module)
- Front LED indicator to show operating status

Rear I/O

- Ethernet: 2 x RJ45
- Display : 2 x DP1.2
- USB : 2 x USB 2.0, 2 x USB 3.0
- LED indicator: power/HDD/GPIO programmable LED
- Power button
- COM #3: RS232/422/485
- COM #1&2: RS232


Ethernet

- LAN chip: dual Intel® I210-IT Gigabit LAN
- Ethernet interface: 10/100/1000 based-Tx Ethernet compatible

Mechanical & Environment

- Color: Pantone black\RAL 15 00 front bezel w/ Pantone 400C\RAL 090 80 10 metal style membrane and black silver PC box
- IP protection: IP65 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm

Dimension Drawing

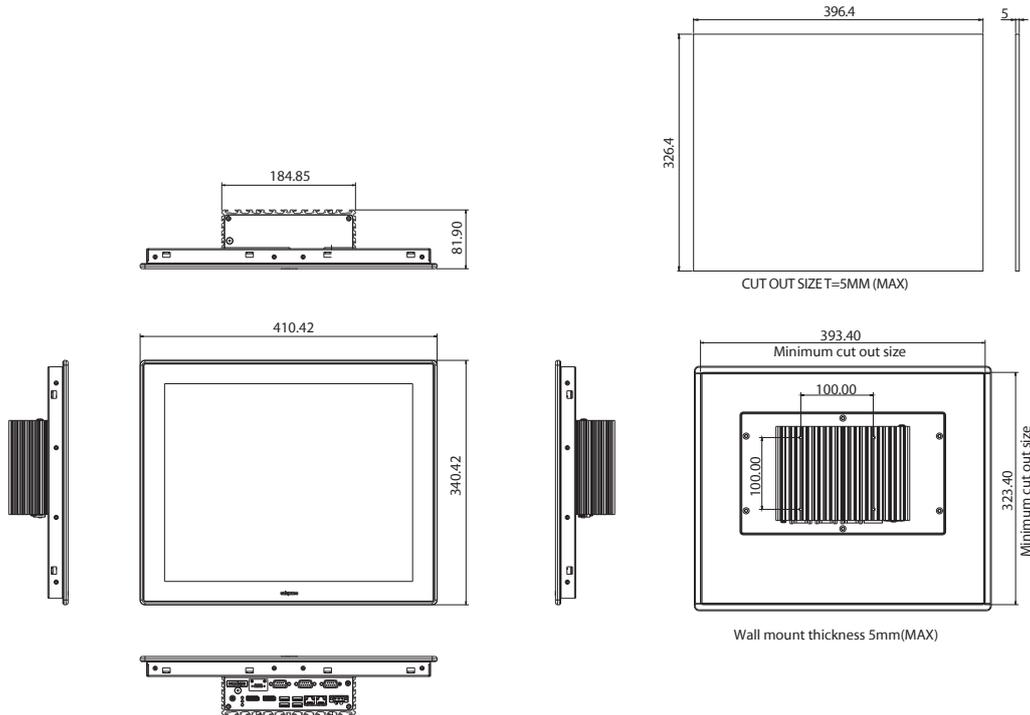

- ♦ Power
 - Power input: 24V VDC
 - Power adapter: optional AC to DC power adapter (+24V, 60W)
- ♦ Vibration:
 - IEC 68 2-64 (w/HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (M.2/SSD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- ♦ Shock
 - IEC 68 2-27
 - HDD: 20G @ wall mount, half sine, 11ms
- ♦ Temperature
 - Operating temperature: 0°C to 50°C
 - Storage temperature: -20°C to 75°C
- ♦ Operating humidity: 10%~90% relative humidity, non-condensing (limits to be at 90% RH at max 50°C)
- ♦ Dimension: 410.42 x 340.42 x 81.9mm
- ♦ Weight: 5.5kg

Certifications

- ♦ CE approval
- ♦ FCC Class A

OS Support Lists

- ♦ Windows 10 64-bit

Ordering Information

Barebone

- ♦ **APPC 1750T (P/N: 10IA0175000X0)**
17" SXGA LED backlight touch panel PC, Intel® Celeron® Quad Core processor J3455, 1.50GHz, touch screen, 4GB DDR3L, 1 x RS232/422/485

Options

- ♦ **24V, 60W AC/DC power adapter w/o power cord (P/N: 7400060054X00)**