

# APPD 1900-2

19" IP65 Industrial 4:3 SXGA LCD Flush Touch Monitor



## Main Features

- ♦ IP65 compliant aluminum front bezel with flush panel by 5-wire touch screen
- ♦ Triple display input interface: analog VGA/DVI-D/DisplayPort
- ♦ Shares identical appearance with APPC series
- ♦ Dual touch screen interface: RS232 or USB (optional)
- ♦ Ultra slim in depth
- ♦ Multiple mounting way for easy integration

## Product Overview

The 19-inch 4:3 LCD display APPD 1900-2 features a 5-wire resistive touch screen, 350 cd/m<sup>2</sup> brightness, and supports resolutions up to 1280 x 1024. APPD 1900-2 is ideal for space-constrained environments where systems and displays are separated. Its flush panel design with a slim bezel and IP65-rated front panel ensures durability in demanding industrial settings.

APPD 1900-2 offers a variety of video interfaces, including VGA, DVI, and DisplayPort, supporting both digital and analog signals. The touch screen can be connected using RS-232 or USB ports. APPD 1900-2 accepts 24VDC  $\pm$ 20% power input and provides panel mount and VESA mount options for flexible installation. APPD 1900-2 is the perfect companion for NEXCOM NISE fanless computers, NIFE Automation PC series, and APPC panel PCs when a second display is needed.

## Specifications

### Panel

- ♦ LCD size: 19", 4:3
- ♦ Resolution: SXGA 1280 x 1024
- ♦ Luminance: 350cd/m<sup>2</sup>
- ♦ Contrast ratio: 1000:1
- ♦ LCD Color: 16.7M
- ♦ Viewing angle: 80 (U), 80 (D), 85 (L), 85 (R)
- ♦ Backlight: LED

### Touch Screen

- ♦ 5-wire resistive (flush panel type)
- ♦ Light transmission: 80%
- ♦ Interface: USB

### Rear I/O

- ♦ Touch screen interface port: RS-232 (1 x DB9) / USB Type-A
- ♦ Video port: VGA (1 x DB15) / DVI-D (1 x DVI-I connector) / DisplayPort
- ♦ DC power input connector: 3-pin Phoenix terminal block


### OSD Function

- ♦ OSD keypad

### Mechanical & Environment

- ♦ Color: Pantone 400C\RAL 090 80 10 aluminum front bezel and black silver chassis box
- ♦ IP protection: IP65 front
- ♦ Mounting: panel/wall/stand/VESA 100mm x 100mm
- ♦ Power
  - Power input: 24V DC  $\pm$  20%
  - Power adapter: optional AC/DC power adapter (24V DC, 60W)
- ♦ Vibration:
  - 2G@50Hz, 5~500Hz, 1hr/axis (Panel Mounting operating), IEC60068-2-64
  - 2Grms@random condition, 5~500Hz, 0.5hr/axis (Panel Mounting operating), IEC 60068-2-64
  - 1G@50Hz, 5~500Hz, 1hr/axis (VESA Mounting operating), IEC 60068-2-64
  - 1Grms@random condition, 5~500Hz, 0.5hr/axis (VESA Mounting operating), IEC 60068-2-64
- ♦ Shock:
  - 20G@wall mount, half sine, 11ms (operating), IEC 60068-2-27
- ♦ Temperature:
  - Operating temperature: 0°C to 50° (Ambient with air flow)
  - Storage temperature: -20°C to 75°C
- ♦ Operating humidity: 10% to 90%, non-condensing (limits to be at 90% RH at max 50°C)
- ♦ Dimension: 425.4mm x 350mm x 53.1mm
- ♦ Weight: 5.1Kg

## Dimension Drawing

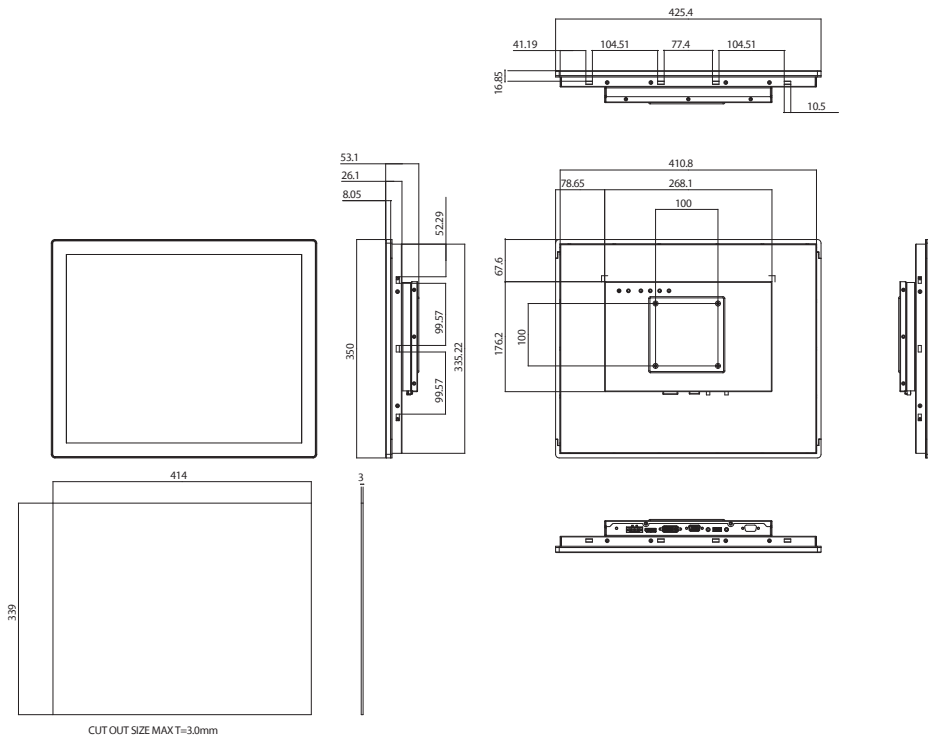

### Certifications

- CE approval (EN 55032, EN 55035)
- FCC Class A

## Ordering Information

### Barebone

- **APPD 1900-2 (P/N: 10IA0190001X0)**  
19" SXGA industrial 4:3 LED backlight flush touch monitor with VGA, DVI-D and display port, 24VDC input, RS-232 or USB touch screen interface

### Options

- **24V, 60W AC/DC power adapter w/o power cord (P/N:7400060054X00)**
- **1.8m DVI-D male to DVI-D male cable (P/N: 603DVI0007X00)**