
CMS 2000



System Overview

CMS Series is range of central management server appliances designed to improve the operation efficiency for network based digital signage displays

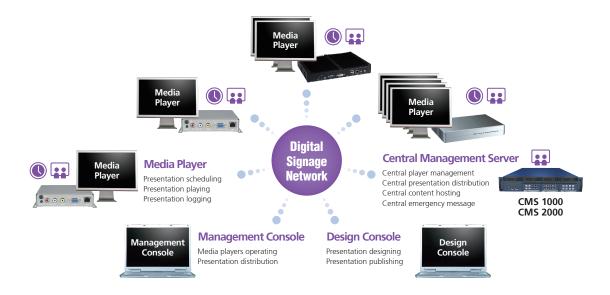

Equipped with feature-rich PowerDigis central management software, CMS 2000 is capable to handle up to 250 displays digital signage operation, including device management, presentation distribution, scheduling, and emergency message. It is a perfect solution for middle scale digital signage display network operation within hospitality, retail, public message, education, and transportation.



Software Specifications

Player Device Management

- Add/Remove/Edit PowerDigis player
- Add/Remove/Edit player group
- Start/Stop/Pause presentation
- Player/Player group power off/reset
- Support up to 250 PowerDigis players

Central Presentation Distribution

- Distribute presentation to player/player group
- Support scheduled distribution or real-time distribution

Central Presentation Schedule

• Schedule player/player group presentation playing time table

Central Content Management

- Hosting contents at central management without distribution to
- Support video/image/flash content file hosting

Emergency Message

- · Send emergency message to player/player group
- · Support scrolling or non-scrolling text message

Software Update

· Support player/player group software update

Hardware Specifications

• Intel® Core® 2 Duo E7400

Main Memory

• 2GB DDR3 SDRAM

I/O Interface-Front

- 2 x LED for Power-on and HDD Status
- 2 x USB 2.0 ports
- 1 x RJ45 type Console port
- 1 x Software reset button
- 4 x Copper LAN ports

I/O Interface-Rear

- 1 x Expansion slot
- 1 x VGA port
- 1 x Power switch

Expansion

• 1 x Mini-PCle expansion slot

Storage Device

- 1 x 3.5" 320GB HDD
- 1 x CF socket

Chassis Dimensions

426.2mm (W) x 365mm (D) x 44mm (H)

Weight

Net: 6.5kg

Ordering Information

+ CMS 2000 (P/N: 10B00200000X0)

Support Intel® Core® 2 Duo E7400 CPU, 2 DDR3 memory slot, 4 Gigabit Ethernet LAN ports, CompactFlash Socket, VGA, USB port, One Mini-PCI Expansion Slot



