


Dimension Drawing

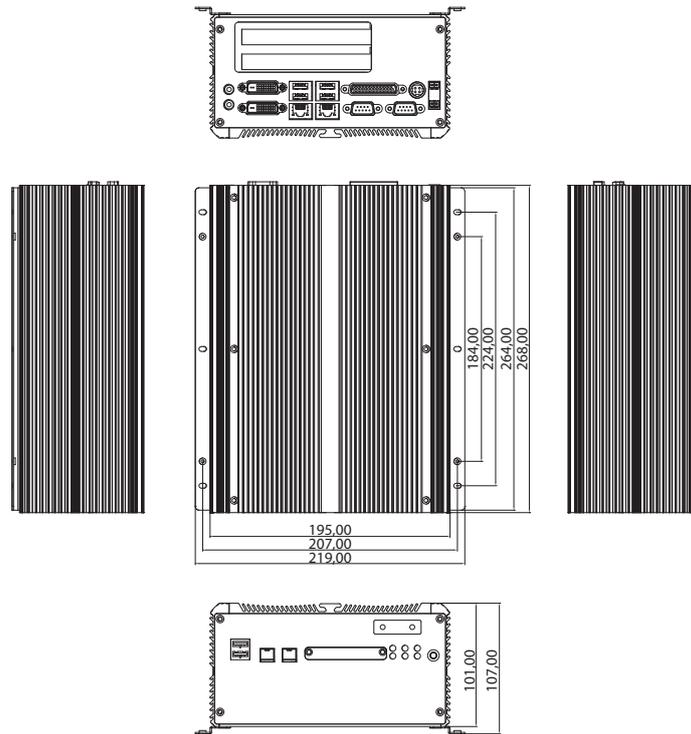

- Relative humidity: 10% to 93% (non-condensing)
- Shock protection:
 - HDD: 20G, half sine, 11ms, IEC60068-2-27
 - CF: 50G, half sine, 11ms, IEC60068-2-27
- Vibration protection w/ HDD condition
 - Random: 0.5Grms @ 5~500 Hz according to IEC60068-2-64
 - Sinusoidal: 0.5Grms @ 5~500 Hz according to IEC60068-2-6

Certifications

- CE
- FCC Class A

Ordering Information

CNC Controller

- ♦ **NControl20 (P/N:10J10002000X0)**
2D½ CNC controller for machining and turning center with Win CE 6.0
- ♦ **NControl20D (P/N:10J10002001X0)**
2D½ CNC controller for machining and turning center with Win CE 6.0 and WE2009
- ♦ **NControl30 (P/N:10J10003000X0)**
3D CNC controller for machining and turning center with Win CE 6.0
- ♦ **NControl30D (P/N:10J10003001X0)**
3D CNC controller for machining and turning center with Win CE 6.0 and WE2009
- ♦ **19V, 120W AC/DC power adapter w/o power cord (P/N: 7410120002X00)**