



## Main Features

- ♦ Intel® Processor N150
- ♦ Slim compact chassis and fanless design
- ♦ 1 x DDR4 3200 SO-DIMM, up to 16GB
- ♦ Support 2 x HDMI® 1.4 output 4K@30Hz
- ♦ Rich I/O connectivity: 2 x 2.5GbE LAN, 3 x USB 3.2, 4 x USB 2.0, 14 x COM

- ♦ 1 x M.2 Key M 2242 for supporting a PCIe storage device
- ♦ 2 x 2.5" SSD tray for supporting SATA storage
- ♦ TPM 2.0 design for security
- ♦ Support power input 12V DC

## Product Overview

The Neu-XE104-N150-14C2S is powered by the Intel® Processor N150, which features upgraded computing performance, low power consumption, and a rich set of integrated IoT features. It supports dual HDMI® 1.4 display outputs, dual 2.5GbE LAN ports, three USB 3.2 ports, four USB 2.0 ports, two RS-232/422/485 ports, twelve RS-232 ports, two 2.5" SSD trays and an M.2 Key M 2242 storage slot that supports PCIe and SATA format.

With its fanless design and extended durability, it can further support a wide range of applications, including IoT gateways, self-service kiosks, endless aisles, QSRs, drive-thru kiosks, bus stops, digital transit information signs, intelligent pole/lighting systems, and information display systems such as PIDS for smart cities.

## Specifications

### Processor

- ♦ Intel® Processor N150, PBP 6W

### Integrated Graphics

- ♦ Intel® UHD Graphics

### Memory

- ♦ 1 x DDR4 3200 SO-DIMM, non-ECC, unbuffered, up to 16GB

### I/O Interface Front

- ♦ 2 x Antenna hole
- ♦ 2 x COM port (DB9), supports RS-232/422/485
- ♦ 4 x COM port (DB9), supports RS-232
- ♦ 1 x Storage active LED
- ♦ 3 x USB 2.0, Type-A

### I/O Interface Rear

- ♦ 2 x 2.5GbE RJ45 LAN port
- ♦ 2 x HDMI® 1.4, up to 3840x2160@30Hz
- ♦ 3 x USB 3.2, 10 Gbps, Type-A
- ♦ 1 x USB 2.0, Type-A

- ♦ 1 x Power button with LED
- ♦ 1 x DC input jack with lock
- ♦ 8 x COM port (DB9), supports RS-232

### I/O Interface Internal

- ♦ 1 x 4-pin header supports speaker out amplifier 2W/4Ω
- ♦ 1 x 9-pin header supports mic in and line out
- ♦ 1 x 10-pin header for GPIO, 4 x GPI, 4 x GPO

### Storage

- ♦ 1 x M.2 Key M 2242 SSD (PCIe 3.0 x1)
- ♦ 2 x 2.5" SSD tray


### Power Supply

- ♦ DC 12V input
- ♦ +12V, 60W AC/DC power adapter in carton

### Environment

- ♦ Temperature:
  - Ambient with air flow: -5°C~50°C
  - Storage temperature: -20°C~80°C
- ♦ Relative Humidity: 95% (non-condensing)
- ♦ Shock protection: 50G peak acceleration, 11ms according to IEC 60068-2-27

## Dimension Drawing

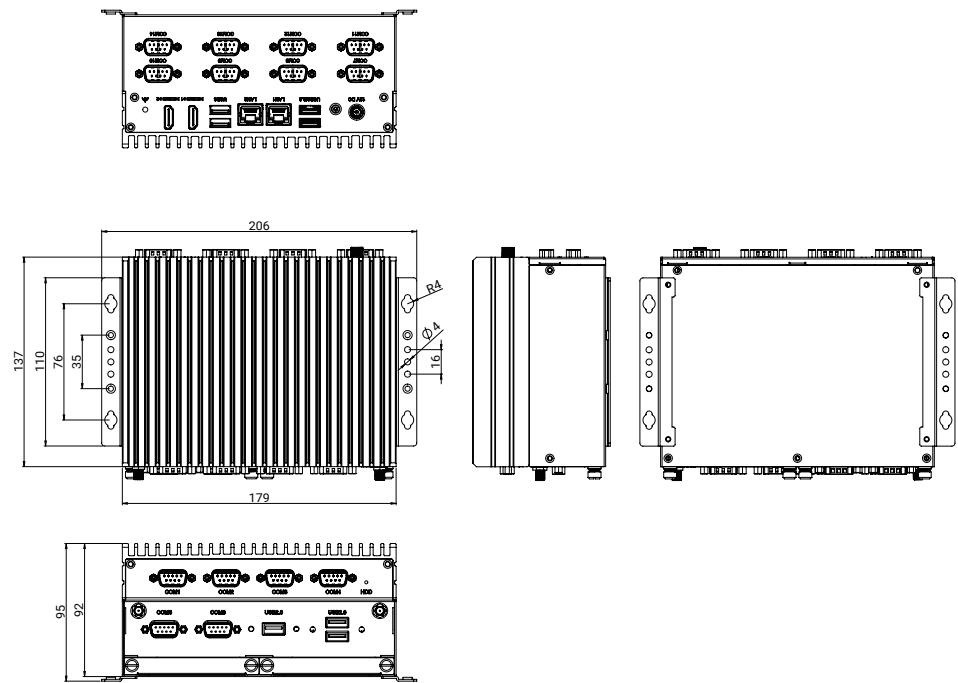

- Vibration protection:
  - Random: 2Grms@5Hz~500Hz, IEC 60068-2-64
  - Sinusoidal: 2G@5Hz~500Hz, IEC 60068-2-6

### Mechanical

- Dimensions: 203mm (W) x 137mm (D) x 95mm (H) (w/ bracket)
- Net weight: 1.65kg

### Package Information

- Dimensions: 282mm (W) x 273mm (D) x 188mm (H)
- Gross weight: 2.53kg (1 unit per carton)

### Certifications

- CE (EN 55035 + EN 55032)
- FCC Class A (EMI Part 15B)
- LVD (EN 62368-1)

### Operating System

- Windows 11
- Windows 10, 64-bit
- Ubuntu 22.04

## Ordering Information

- Neu-XE104N150-14C2S (P/N: 10W10E10401X0)  
Intel® Processor N150, 6W fanless system