



Main Features

- ♦ Low Power COM Express CPU Module
- ♦ Onboard Intel® Atom™ N450 1.66GHz Processor
- ♦ Intel® ICH8M Chipset
- ♦ Support DDR2 667 SO-DIMM up to 2GB
- ♦ Intel® PCI Express GbE 82574L
- ♦ Support 3 x SATA, 1 x IDE, 8 x USB2.0 for fast peripherals
- ♦ Micro COM Express Type II supports up to 5 Express lanes, 32 bit PCI interface and one IDE and Gigabit LAN

Product Overview

ICES 251 is a COM Express Type 2 compact module that features Intel® Atom™ N450 1.66GHz and ICH8M in small foot print. ICES 251 provides outstanding performance in the combination of high computing power and low thermal dissipation.

ICES 251 supports DDR2 667 SO-DIMM memory up to 2GB, and supports 3 x SATA, 1 x IDE, 8 x USB2.0 for fast peripherals.

ICES 251 is type 2 COM Express Module support up to 5 Express lanes, 32 bit PCI interface and one IDE and Gigabit LAN.

Specifications

CPU Support

- ♦ Onboard Intel® Atom™ N450 1.66GHz Processor

Chipset

- ♦ Intel® ICH8M chipsets

Main Memory

- ♦ Support one un-buffered non-ECC DDR2 SO-DIMM 667 up to 2GB

BIOS

- ♦ AMI System BIOS
- ♦ SPI ROM
- ♦ Plug & Play support
- ♦ Advanced Power Management and Advanced Configuration & Power Interface support

Display

- ♦ Intel® N450 integrated graphics solution with dynamic video memory allocation
- ♦ Analog monitor with pixel resolution up to 1400x1050 @60Hz
- ♦ Support Single channel for 18 bit
- ♦ LFP (local flat panel) LVDS interface

On-board LAN

- ♦ Intel® PCI Express GbE 82574L x 1

- ♦ Support PXE LAN boot function
- ♦ Support Wake on LAN function

Audio

- ♦ HD Configurable Audio bus Interface

Storage

- ♦ 3 x SATA
- ♦ 1 x IDE

Interface


- ♦ Reset signal
- ♦ 8 GPIO lines (GPI 0~3 and GPO0~3), CMOS Level (0/3.3V)
- ♦ I2C Interface/SMBus Interface
- ♦ USB 2.0 x 8
- ♦ PATA

Other Interfaces

- ♦ One 3pin fan connector (90 degree, 12V)

COM Express Connector

- ♦ AB connector
- ♦ VGA/ LVDS/8 x USB/ HD Audio interface/3 x SATA/ LAN/ GPIO(3.3V)/ LPC bus/ 1 x PCIe x4/1 x PCIe x1/SMBus/ I2C/SPI BIOS
- ♦ CD connector, IDE, PCI

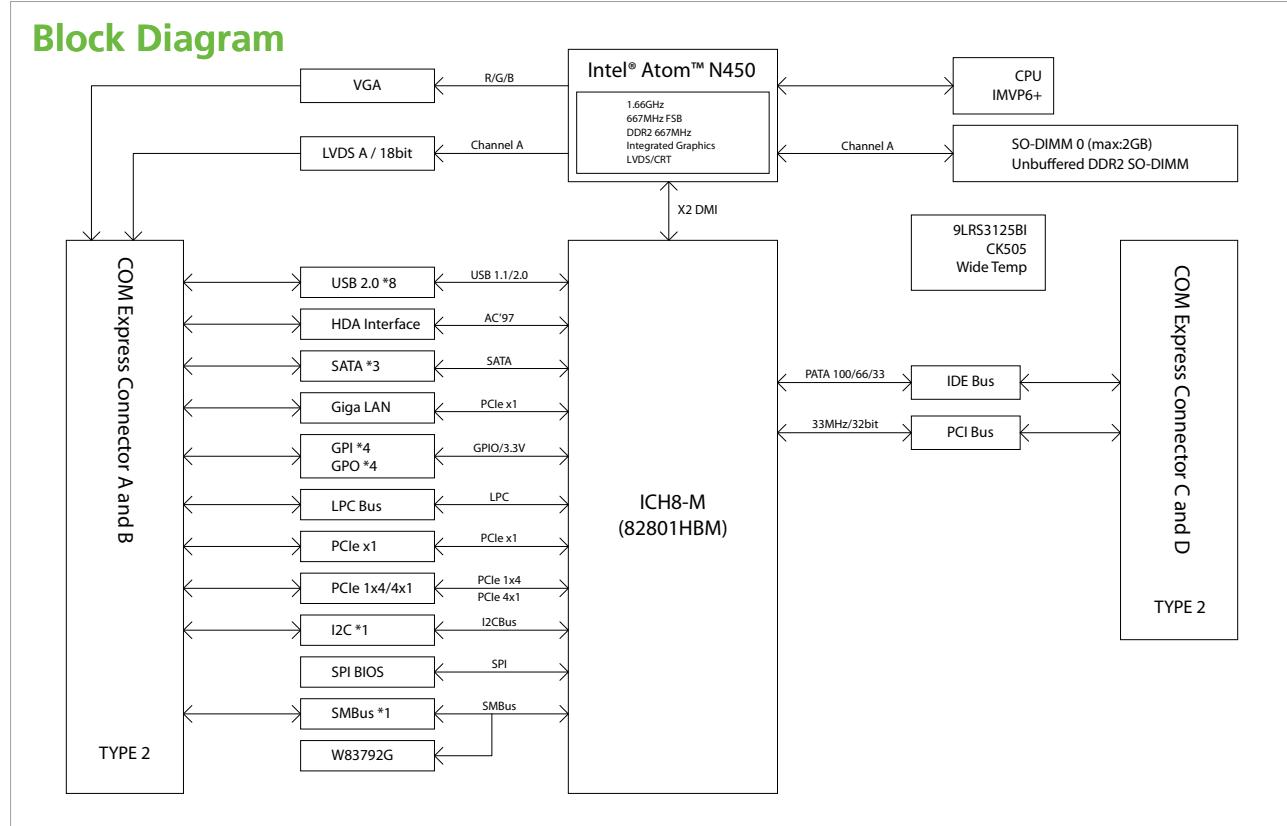

Power Requirements

- +12Vdc, 3.3V battery, +5Vsb power input
- Support both AT and ATX power supply mode

Power Management

- ACPI 2.0 compliant with battery support. Also supports Suspend to RAM (S3)

System Monitor

- Monitoring of 4 voltages, 2 temperatures and 1 fan Speed.
- 4 voltage (For +5V, +12V, Vcore, +3.3V)
- 2 Temperatures (CPU and one external Temperature Sensor)

Carrier Board

- ICEB 8050

Dimensions

- 95mm (W) x 95mm (L)

Environment

- Operating temperature: -20°C to 60°C (ICES 251)
- Operating temperature: -40°C to 80°C (ICES 251X)
- Storage temperature: -20°C to 85°C (ICES 251)
- Storage temperature: -40°C to 85°C (ICES 251X)
- Relative humidity:
10% to 97% (operating, non-condensing)
5% to 97% (non-operating, non-condensing)

Certifications

- CE approval
- FCC Class A

Ordering Information

• ICES 251 (P/N: 10K00025100X0)

COM Express Type 2 compact module with Intel® Atom™ N450 1.66GHz DDR2/ PCIe/ PCI/ IDE/ GbE/ LVDS/ audio interface

• ICES 251X (P/N: 10K00025102X0)

COM Express Type 2 compact module extended -40°C to + 85°C with Intel® Atom™ N450 1.66GHz DDR2/ PCIe/ PCI/ IDE/ GbE/ LVDS/ audio interface

• ICEB 8050 (P/N: 10KB0805000X0)

COM Express Type 2 evaluation board with PCIe/ PCI/ SATA/ CF/ IDE/ COM/ USB/ LVDS/ VGA/ LAN