

ATC 3750-IP7-6C

High Performance NVIDIA® Jetson AGX Orin™
Edge AI Computer for In-vehicle/Railway Applications



Main Features

- ♦ Built-in NVIDIA® Jetson AGX Orin™ SOM, up to 200/275 INT8 Sparse TOPS AI performance
- ♦ Designed to be IP67 rated, rugged, and compact
- ♦ 6 x GbE PoE+ port for IP CAM/LiDAR sensors, optional 1 x 10GbE port
- ♦ HEVC/H.265 hardware decode, supports up to 7 x 4K30
- ♦ Wide range operating temperature of -25°C~60°C/EN 50155 (OT3)
- ♦ Ultra-speed PCIe 4.0 x4 NVMe SSD for data integrity

- ♦ Expandable for GNSS, LTE/5G NR & Wi-Fi 5/6
- ♦ DC 9V~36V & DC 24V rail combined, ignition control & OCP/OVP for In-vehicle/Rail
- ♦ NEXCOM Acceleration Linux (NAL) integrated w/ JetPack 6.1
- ♦ Military standard of MIL-STD-810H for anti-vibration/shock
- ♦ CE/FCC, UKCA, E-mark, EN 50155 (EN 50121-3-2, EN 61373, OT3) certified

Product Overview

AI has become an essential component of automated vehicle technologies. With its built-in high performance NVIDIA® Jetson AGX Orin™ SOM, the ATC 3750-IP7-6C can deliver up to 200/275 TOPS workload on Artificial Intelligence (AI) processing and inference, supporting applications such as ADAS/Construction, ANPR, AMR, Machine Learning (ML), ITS, railway safety assurance, and factory automation.

Thanks to NEXCOM's excellent thermal solutions, the ATC 3750-IP7-6C can work through its defined TDP (15W to 60W) in harsh environments without a fan kit to achieve 200/275 TOPS workload performance.

The ATC 3750-IP7-6C is an IP67 rated, rugged, compact-size in-vehicle/rail AI powered computer that features DC 9V to 36V/DC 24V rail with IGN control, six PoE+ ports and one optional 10GbE port for accessing IP CAM/LiDAR sensors, and rich peripheral ports, USB 3.2, isolation CAN bus, RS-232, Console, DI/DO, OTG and HDMI®. With the installation of 5G NR, Wi-Fi 5/6 modules, the ATC 3750-IP7-6C can collaborate with CPS for AI model re-training, making it suitable for deployment in sophisticated applications such as ADAS/ANPR/AI-aided ITS/Construction, etc. In harsh environments, the ATC 3750-IP7-6C can operate at a wide temperature range of -25°C to 60°C/EN 50155 (OT3) and meet the MIL-STD-810H military standard for anti-vibration and shock. For regulation, the ATC 3750-IP7-6C is certified by CE/FCC Class A, UKCA, E-mark (E13) and EN 50155.

Specifications

NVIDIA® Jetson AGX Orin™ SOM

- ♦ Jetson AGX Orin™ 32GB
 - CPU: 8-core Arm® Cortex®-A78AE v8.2 64-bit, 2MB L2 + 4MB L3
 - GPU: 1792-core NVIDIA® Ampere architecture with 56 Tensor Cores
 - Memory: 32GB 256-bit LPDDR5, 204.8GB/s
 - AI performance: 200 INT8 Sparse TOPS
 - 2 x NVDLA v2.0 engines: 1.4 GHz, 46 TOPS each (Sparse INT8)
 - Video encode: 1 x 4K60/3 x 4K30/6 x 1080p60/12 x 1080p30 (H.265)
 - Video decode: 1 x 8K30/2 x 4K60/4 x 4K30/9 x 1080p60/18 x 1080p30 (H.265)
- ♦ Jetson AGX Orin™ 64GB
 - CPU: 12-core Arm® Cortex®-A78AE v8.2 64-bit, 3MB L2 + 6MB L3
 - GPU: 2048-core NVIDIA® Ampere architecture with 64 Tensor Cores
 - Memory: 64GB 256-bit LPDDR5, 204.8GB/s
 - AI performance: 275 INT8 Sparse TOPS
 - 2 x NVDLA v2.0 engines: 1.6 GHz, 52.5 TOPS each (Sparse INT8)
 - Video encode: 2 x 4K60/4 x 4K30/8 x 1080p60/16 x 1080p30 (H.265)
 - Video decode: 1 x 8K30/3 x 4K60/7 x 4K30/11 x 1080p60/22 x 1080p30 (H.265)
- ♦ OpenGL 4.6+, OpenGL ES 3.2, CUDA® 10.2+, and Vulkan 1.2+
- ♦ NVIDIA® JetPack 6.1

Storage

- ♦ 64GB eMMC 5.1 flash storage, 200MHz (HS400 or HS533)
- ♦ 1 x Accessible SD card (SDXC-I/UHS-I, SD 3.0)
- ♦ 1 x M.2 Key M 2280 (PCIe 4.0 x4) NVMe SSD

Expansion

- ♦ 1 x Full size Mini PCIe slot (PCIe 4.0, USB 2.0)
- ♦ 1 x M.2 Key B 3042/3052 (USB 3.2/2.0), 2 x nano-SIM
- ♦ 1 x M.2 Key E 3030 (PCIe 4.0, USB 2.0) for Wi-Fi 5/6

Display

- ♦ 1 x HDMI® 2.0a/b, up to 3840x2160@60Hz, water-proof type

G-Sensor

- ♦ 3D accelerometer and 3D gyroscope, ST LSM6DSLTR

PoE+

- ♦ 6 x 1GbE M12 X-coded PoE connector
 - 9Kbyte Jumbo frame
 - IEEE 802.3af/at, total 80W
 - IEEE1588 supported
 - PSE ON/OFF & Watt monitoring
 - GIGA LAN switch: KSZ9477STXI

USB

- ♦ 2 x USB 3.2 Gen 2:
 - M12 X-coded connector
 - 5V@900mA each
 - Up to 10Gbit/s link speed & compliance with USB 2.0 (LS/FS/HS link speed)
- ♦ 1 x OTG, Micro-USB


Serial Port

- ♦ 2 x RS-232 (Tx, Rx, RTS, CTS)
- ♦ 1 x Console (Tx, Rx)
- ♦ RS-232 working voltage ± 9V, baud rate up to 115.2kb/s
- ♦ M17 A-coded connector

DI/DO (isolation)

- ♦ 4-bit input
 - Source: DC 9V~36V (12V@1.1mA/24V@2.2mA)
 - External: DC 0V~33V pull-high, high-level, DC 3.3V~33V; low-level, DC 0V~2V
- ♦ 4-bit output
 - Source: DC 9V~36V (nominal 35mA@24V)

Dimension Drawing

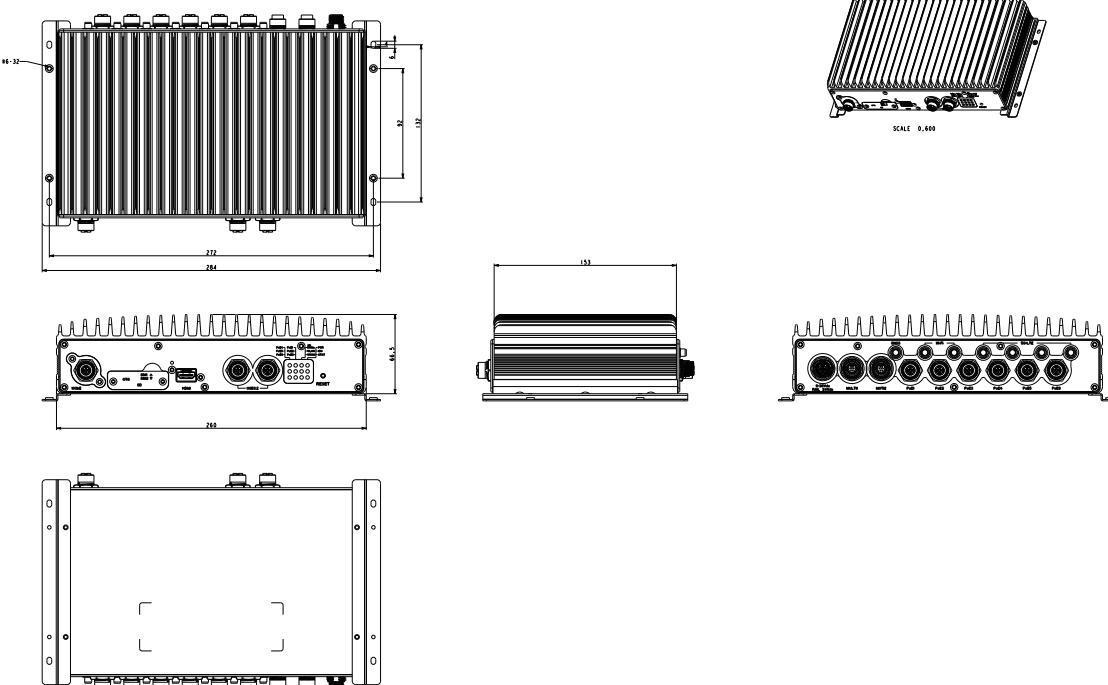

- External: DC 5V~27V pull-high, sink current w/ 220mA for each bit, 500mA max (@25C)
- ♦ Source or external can be selected by software (default: source type)

CAN bus

- ♦ 2 x CAN FD, compatible with CAN 2.0A/2.0B
- ♦ IEC 61000-4-2 Electrostatic Discharge (ESD): ± 8KV/15KV (contact/air)
- ♦ Up to 5Mb/s in data transmit, 2.5KV isolated

10GbE, M12 X-coded (optional)

- ♦ Ethernet PHY: Marvell AQR113C-BO-I
- ♦ 10GBASE-T/5GBASE-T/2.5GBASE-T/1000BASE-T/100BASE-TX/10BASE-T
- ♦ Compliant with IEEE 802.3az
- ♦ 9Kbyte Jumbo frame
- ♦ IEEE1588 supported

Watch Dog Timer

- ♦ Yes, through MCU

Remote ATX PWR & Reset Trigger

- ♦ Reserved, wafer-type

GNSS

- ♦ u-blox NEO-M9N GNSS module for GPS/Gloness/QZSS/Galileo/Beidou
- ♦ Optional DR (Dead Reckoning) function, NEO-M9V

DC Power

- ♦ 5V/2A, wafer type

Power Supply

- ♦ Nominal voltage: DC 9V~36V or 12V non-isolation for rail
- ♦ Cranking voltage: 6V~9V (less than 20 sec)
- ♦ OCP & UVP (shut down once exceeding 37V)
- ♦ Ignition on/off control & programmable on/off delay timer
- ♦ Optional for remote power on/off control

I/O Ports, Front-Plate

- ♦ 12 x LED Indicator
- ♦ 2 x USB 3.2, M12 X-coded
- ♦ 1 x 10GbE M12 X-coded connector (optional)
- ♦ 1 x water-proof HDMI®
- ♦ 2 x nano-SIM, 1 x SD, 1 x OTG (a door to cover)

I/O Ports, Rear-Plate

- ♦ DC 9V~36V/24V non-isolate, K-coded
- ♦ 6 x 1GbE M12 X-coded PoE connector
- ♦ 1 x M17 A-coded (Multi-1): 2 x CAN FD + 4 x DI + 4 x DO
- ♦ 1 x M17 A-coded (Multi-2): 2 x RS-232 + 1 x Console + remote PWR button/RESET + DR
- ♦ 1 x SMA for GNSS
- ♦ 2 x RP-SMA for Wi-Fi
- ♦ 2 x SMA for LTE/5G

Dimension & Weight

- ♦ Dimensions: 260.0mm (W) x 172.8mm (D) x 66.5mm (H)
w/ mount bracket
- ♦ weight: 3.5kg

Environment

- ♦ Operating temperature: -25°C~60°C/EN 50155 (OT3) (TDP 15W~60W, fanless, w/ 80W PoE)
- ♦ Storage temperature: -40°C~85°C
- ♦ Relative humidity: 10%~95% (non-condensing)

Vibration & Shock

- ♦ Vibration in operating:
 - MIL-STD-810H, 514.8C Procedure 6, Category 4
 - IEC 60068-2-64: 2.0g@5Hz~500Hz
- ♦ Vibration in storage:
 - MIL-STD-810G, 514.6E Procedure 1, Category 24, 7.7g
- ♦ Shock:
 - MIL-STD-810G, 516.6 Procedure I, trucks and semi-trailers=40g
 - Crash hazard: Procedure V, ground equipment=75g

Certifications

- ♦ CE approval, FCC Class A, UKCA, E13, EN 50155 certified

Operating System

- ♦ NEXCOM Aided Linux (NAL) w/ Jetpack 6.1 integrated
 - NEXCOM custom functions (GNSS, 5G/NR, 6-axis sensor, MCU control)
 - Ubuntu 22.04 (L4T 36.3, Linux Kernel 5.15)

External Cable (optional)

- ♦ Multi-1 adapter cable, 30cm
- ♦ Multi-2 adapter cable, 30cm
- ♦ K-code power cable, 30cm
- ♦ X-coded LAN adapter cable, 60cm
- ♦ X-coded USB 3.2 adapter cable, 30cm

Ordering Information

ATC 3750-IP7-6C (P/N: 10AT0375009X0)

NVIDIA® Jetson AGX Orin™ 32GB, 64GB eMMC, 6 x PoE+ (X-coded), 2 x USB 3.2, 2 x RS-232, OTG/Console, IP67, DC 9V~36V/non-iso DC 24V

ATC 3750-IP7-6C-64 (P/N: 10AT0375010X0)

NVIDIA® Jetson AGX Orin™ 64GB, 64GB eMMC, 6 x PoE+ (X-coded), 2 x USB 3.2, 2 x RS-232, OTG/Console, IP67, DC 9V~36V/non-iso DC 24V