# **TPM9660-TT**

#### TPM Infineon: SLB 9665TT2.0FW5.62





### **Main Features**

- Infineon: SLB 9665TT2.0 FW5.62
- TPM 2.0

- LPC interface
- Built-in support by Linux Kernel Version 3.10 and higher

## **Specifications**

#### Mainboard

- Infineon: SLB 9665TT2.0 FW5.62
- TPM 2 x 7-pin header
- Optimized for battery operated devices: low standby power consumption (typ. 150µA)
- Built-in support by Linux Kernel Version 3.10 and higher

#### Dimensions

- PCBA dimension: 28.28 x 28 x 4mm
- Bracket dimension: 28.5 x 23.78 x7.5mm


#### Environment

- Operating temperatures: 0°C~40°C
- Storage temperature: -20°C~60°C
- Relative humidity: 10%~90% non-condensing

## Ordering Information

- TPM module (P/N: 10Q000TPM00X1) TPM Infineon: SLB 9665TT2.0FW5.62
- Available on selected NEXCOM network appliances. Contact us for further inquiry.

# **Dimension Drawing**

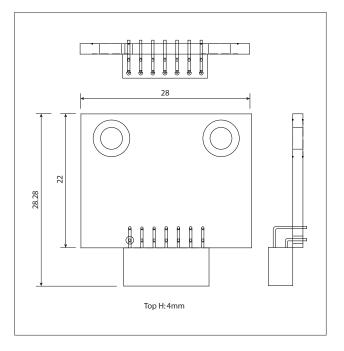



www.nexcom.com

**NECOM** Last update: 07/29/2021