

XPPC 10-10N97

10.1" TFT WXGA 16:10 Slim Bezel Embedded Touchscreen Computer
Powered by Intel® Processor N97



Main Features

- 10.1" TFT WXGA 16:10 panel
- 10-point PCAP multi-touch with slim bezel design
- IP65 protection on the front
- VESA/panel mount/open frame supported
- Intel® processor N97, 6M cache, up to 3.6GHz
- 1 x DDR4 SO-DIMM, up to 16 GB
- 1 x M.2 Key M 2242, supports PCIe x1 & SATA for storage
- 1 x Full-size Mini PCIe, supports a Wi-Fi/LTE module
- Support DC 12V power input

Product Overview

The 10.1" embedded fanless panel PC XPPC 10-10N97, features an industrial motherboard and is designed for vertical industrial applications. The XPPC 10-10N97 features an industrial-grade panel offering 1280 x 800 (WXGA) resolution and 400-nit brightness. Its front panel adopts a slim bezel design and complies with the IP65 rating. Its flexible mounting options make it the perfect fit for industrial applications.

The XPPC 10-10N97 is powered by an Intel® processor N97. With built-in Intel® UHD Graphics, it supports AI inference, enhancing visual quality and graphics performance. With rich I/O of USB 2.0, USB 3.2, GLAN, and COM port, it fulfills the demands of various edge computing applications. The XPPC 10-10N97 is ideal for diverse applications, such as self-service kiosks, smart retail, and payment machines.

Specifications

Panel

- LCD size: 10.1", 16:10
- Resolution: 1280x800 (WXGA)
- Luminance:
 - LCD panel: industrial grade 400cd/m²
 - XPPC PCAP touch: 90% of panel's luminance after optical bonding
- Contrast ratio: 1000
- LCD color: 16.7M
- Viewing angle: 89 (U), 89 (D), 89 (L), 89(R)
- Touchscreen
 - 10-point PCAP (projected capacitive touch)
 - Optical bonding
 - Glass surface treatment: AS (anti-smudge coating for easy cleaning)

Processor

- Intel® processor N97

Integrated Graphics

- Intel® UHD Graphics

System Capabilities

- TPM 2.0

Memory

- 1 x DDR4 SO-DIMM, non-ECC, up to 16GB

Storage

- 1 x M.2 Key M 2242 SSD (PCIe 3.0 x1, SATA 3.0)
- 1 x Mini PCIe slot (mSATA)

Expansion Slot

- 1 x Mini PCIe slot
 - Support a Wi-Fi/BT module

I/O Interface Rear

- 1 x DC 12V input
- 2 x 1GbE RJ45 port, Intel® I210-AT
- 1 x HDMI® 2.0b, up to 3840x2160@60Hz
- 2 x USB 3.2 Gen 1x1, Type-A
- 2 x USB 2.0, Type-A
- 1 x Speaker out (can't hot plug)
- 1 x Power button


I/O Interface Front

- 2 x Antenna hole
- 1 x COM port, supports RS-232/422/485

I/O Interface Internal

- 1 x 4-pin header for Line out
- 1 x 10-pin header for 4-in & 4-out GPIO
- 1 x 9-pin header for RS-232 (COM2)
- 1 x 3-pin jumper for LCD panel voltage 3.3V/5V setting
- 1 x DC power thru one 2-pin pitch=3.96mm ATX connector (lockable)

Dimension Drawing

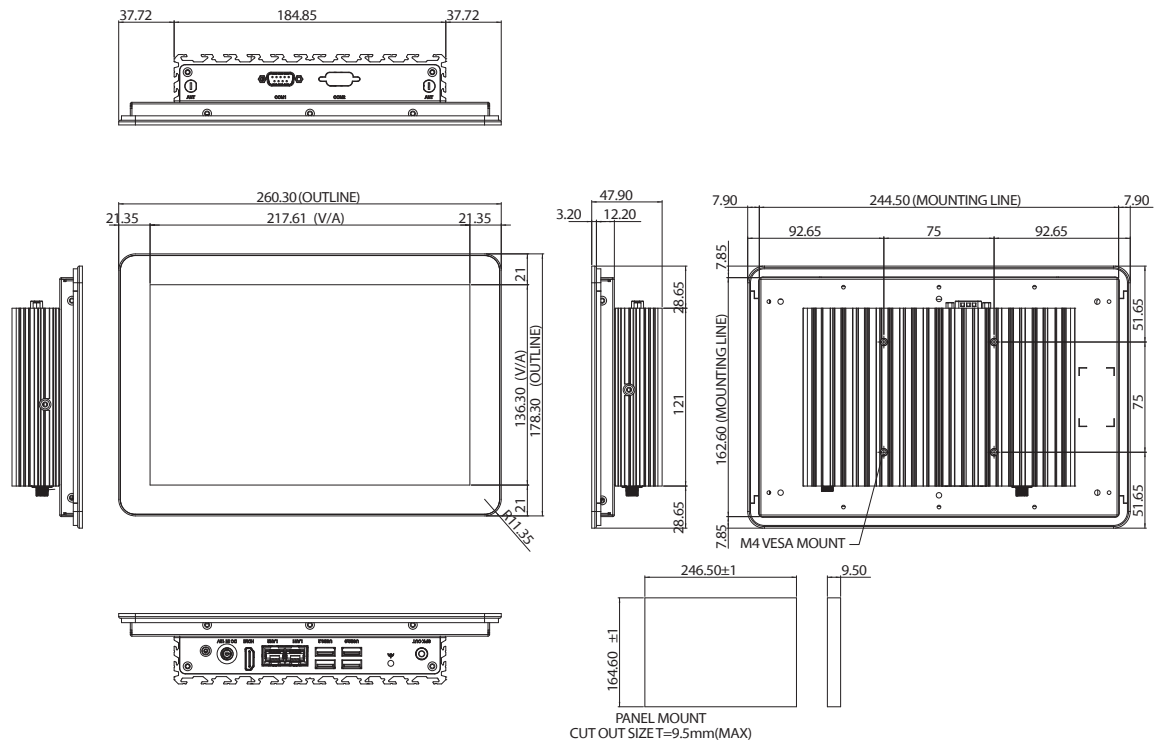

Mechanical

- Dimensions: 260.3mm (W) x 178.3mm (D) x 47.9mm (H)
- Weight: 1.62kg
- Mounting type:
 - VESA mount 75mm x 75mm
 - Panel mount (optional kit)
 - Open frame (optional kit)

Package Information

- Dimensions: 343mm x 308mm x 158mm
- Gross weight: 2.7kg (1 unit per carton)

Environment

- Temperature:
 - Ambient with air flow: 0°C ~ 50°C
 - Storage temperature: -20°C ~ 60°C
- Relative humidity: 0%~90% (non-condensing)
- Shock protection: 20g peak acceleration, 11ms according to IEC 60068-2-27
- Vibration protection:
 - Random: 2.2Grms@5Hz~500Hz, 0.5hr/axis (non-operating), IEC 60068-2-64
 - Sinusoidal: 2Grms@5Hz~500Hz, 1hr/axis, IEC 60068-2-6

Power Supply

- DC 12V power input
 - 1 x 12V, 60W AC/DC lockable adapter included in accessory

Certifications

- CE (EMC EN 55035 + EN 55032)
- FCC Class A (EMI Part 15B)
- LVD (EN 62368-1)

Operating System

- Windows 11
- Windows 10, 64bit
- Linux

Ordering Information

Barebone

- **XPPC 10-10N97 (P/N: 10W30XPPC41X0)**
10.1" WXGA LED multi-touch panel PC w/ optical bonding, Intel® processor N97
- **Panel mount kit (P/N: 88W30XPPC02X0)**
- **Open frame kit (P/N: 88W30XPPC13X0)**