


XPPC 10-100-Ag+

10.1" TFT WXGA 16:10 Slim Bezel, Multi Touchscreen Computer

Powered by Intel® Apollo Lake J3455 Processor

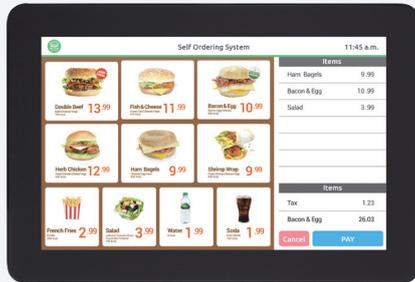

Main Features

- ♦ 10.1" TFT WXGA 16:10 panel
- ♦ 10-point PCAP multi-touch with slim bezel design
- ♦ IP65 protection on the front
- ♦ Support: VESA/panel/openframe mount
- ♦ Intel® Celeron® processor J3455, Quad Core, 1.50 GHz
- ♦ 1 x DDR3L up to 8GB, M.2 2242 Key M for storage device
- ♦ Support power input 19 VDC
- ♦ Antimicrobial Corning® Gorilla® Glass

Product Overview

NEXCOM is making one of the everyday objects that we encounter more hygienic and safe. Touch screens are increasingly ubiquitous across transportation and retail sectors, where we've thoughtfully enhanced our own XPPC touchscreen computers with antimicrobial Corning® Gorilla® Glass. Customers are sure to worry less about contacting bacteria while businesses increase efficiency, all contributing to a more stress-free society. The 10.1" fanless touchscreen computer XPPC 10-100 incorporating an industrial motherboard is intended for versatile industrial applications. XPPC 10-100 has a touch screen LED backlight LCD panel with 1280 x 800 (WXGA) resolution and 400-nit brightness.

Specifications

Panel

- ♦ LCD size: AUO G-series 10.1", 16:10
- ♦ Resolution: WXGA 1280 x 800
- ♦ Luminance
 - LCD panel: 400cd/m2
 - XPPC PCAP touch: 360cd/m2
- ♦ Contrast ratio: 800
- ♦ LCD color: 16.7M
- ♦ Viewing angle: 89 (U), 89 (D), 89 (L), 89 (R)
- ♦ Backlight: LED

Touch Screen

- ♦ Antimicrobial Corning® Gorilla® Glass
- ♦ Delivers intrinsic and long-lasting antimicrobial efficacy, with EPA registration and compatibility with an easy-to-clean technology
- ♦ Maintains the durability and scratch resistance of Corning® Gorilla® Glass 3
- ♦ Maintains the exceptional surface quality and optical clarity of Corning® Gorilla® Glass 3
- ♦ 10-point PCAP (projected capacitive touch)
- ♦ Optical bonding

System

- ♦ CPU: onboard Intel® Celeron® processor J3455, 1.50GHz, 2M cache
- ♦ Graphic: Intel® HD Graphics

Main Memory

- ♦ 1 x SO-DIMM socket support up to 8GB DDR3L 1866 MHz, non-ECC and un-buffered memory

Storage Device

- ♦ 1 x M.2 2242 Key M SSD (support SATA 3.0)

Expansion

- ♦ 1 x mini-PCIe full-size connector with SIM slot (full-size) onboard, support Wi-Fi/LTE module


Rear I/O

- ♦ LED for power on/off
- ♦ Power switch
- ♦ 19V DC-in power jack lock type
- ♦ 2 x RJ45 with LEDs for Gigabit LAN
- ♦ 1 x HDMI 2.0, resolution 4096 x 2160 60Hz
- ♦ 2 x USB 3.0
- ♦ 1 x Line-out
- ♦ COM 1: RS232/422/485

Front I/O

- ♦ 2 x Antenna hole

Dimension Drawing

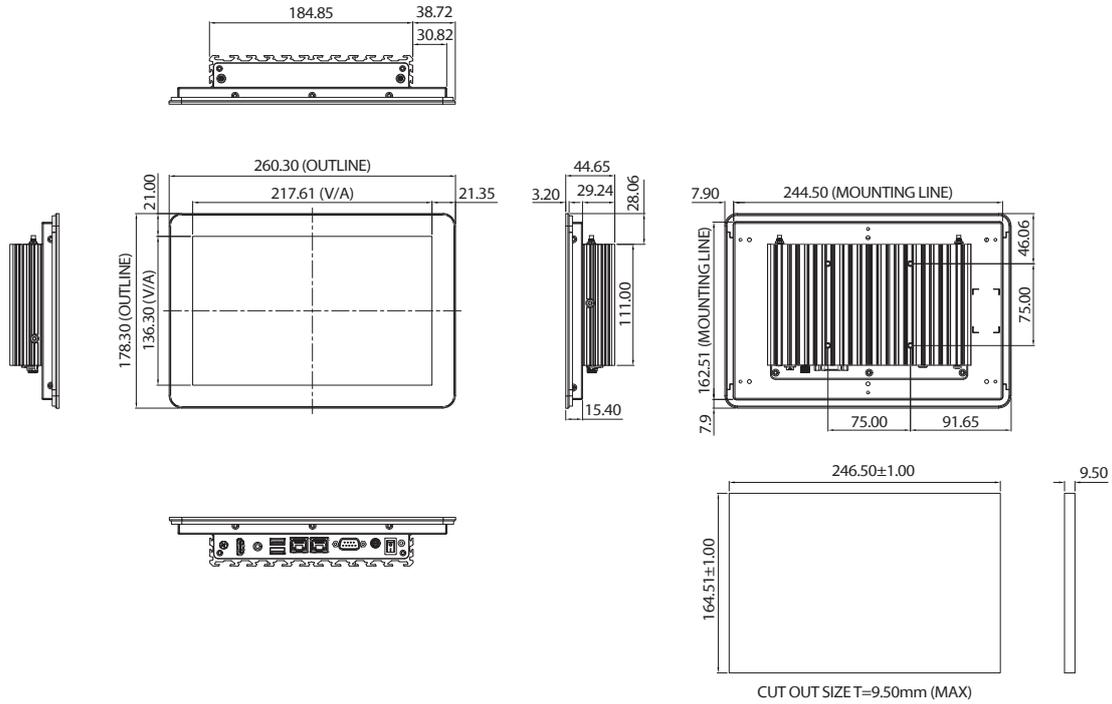

Mechanical & Environment

- Color/material: black silver/metal sheet
- Support
 - VESA mount 75mm x 75mm
 - Panel mount
 - Open frame

Environment

- Vibration
 - IEC 60068-2-64
 - 2Grms @ sine, 5~500Hz, 1hr/axis
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock
 - IEC 60068-2-27
 - 20g peak acceleration (11 msec. duration)
- Temperature
 - Operating temperature: 0°C~50°C
 - Storage temperature: -20°C~60°C
- Operating humidity: 10%~90% relative humidity, non-condensing limits to be at 90%

Dimensions

- System: 260.3mm x 178.3mm x 44.65mm
- System weight: 2 kg
- Package: 335mm x 302mm x 160mm
- Package weight: 3 kg

Power Supply

- 1 x External 45W AC/DC power adapter with lock (power adapter is included in accessory)
- Input: 100VAC to 240VAC
- Output: DC+19VDC

Certifications

- CE (EN55035 + EN55032)
- FCC Class A (EMI part 15B)
- LVD (EN62368-1)

OS Support Lists

- Windows 10 64-bit
- Linux 4.1

Ordering Information

Barebone

- **XPPC 10-100-Ag (P/N: 10W30XPPC06X0)**
10.1" WXGA antimicrobial Ag+ touchscreen computer powered by Intel® Celeron® J3455
- **Panel mount kit (P/N: 88W30XPPC02X0)**
- **Open frame kit (P/N: 88W30XPPC03X0)**