



Main Features

- Built-in NVIDIA Jetson Orin Nano™ SoM, up to 67 INT8 Sparse TOPS AI performance in Super Mode
- 4 x GbE PoE+ port for IP CAM/LiDAR sensors
- HEVC/H.265 hardware codec, 11 x 1080p30 compute power (decoded)
- Wide range operating temperature of -25°C~60°C (fanless, in Super Mode)
- The rugged, compact-sized, fanless design with IP67 rating
- Ultra-speed PCIe 4.0 x4 NVMe SSD for data integrity, 128GB SSD in default
- NEXCOM Acceleration Linux (NAL) OS w/ JetPack 6.2 integrated
- Expandable for LTE/5G NR & Wi-Fi 5/6
- 9V~36V DC-in with ignition control & OCP/UVF
- CE/FCC, UKCA, and E-mark certified

Product Overview

AI has become a vital part of autonomous vehicle technologies. Equipped with the high-performance NVIDIA Jetson Orin Nano™ SoM, the ATC 3560-IP7-NA4C delivers up to 67 TOPS of AI inference performance in Super Mode, making it ideal for applications such as Advanced Driver Assistance Systems (ADAS) in transportation and construction, Automatic Number Plate Recognition (ANPR), Autonomous Mobile Robots (AMR), Machine Learning (ML), Intelligent Transportation Systems (ITS), and factory automation. Thanks to NEXCOM's advanced thermal design and its full IP67 rating, the ATC 3560-IP7-NA4C can maintain up to 67 TOPS even in harsh conditions, enabling consistent real-time AI inference.

The ATC 3560-IP7-NA4C is purpose-built for in-vehicle AI computing. It supports DC 9V to 36V power with IGN control, and features four GbE PoE ports for long-distance IP cameras and LiDAR sensors. It also offers a wide range of I/O, including USB 3.2, isolated CAN bus, RS-232, console port, digital I/O (DI/DO), OTG, and HDMI®.

With optional 5G NR and Wi-Fi 5/6 modules, the ATC 3560-IP7-NA4C can connect with CPS (Cyber-Physical Systems) for AI model retraining, enhancing inference precision in the field.

Built to endure tough conditions, the ATC 3560-IP7-NA4C supports an operating temperature range of -25°C to 60°C, and complies with MIL-STD-810H for resistance to shock and vibration. It is certified to CE/FCC Class A, UKCA, and E-mark standards.

Specifications

NVIDIA Jetson Orin Nano™ SoM

- NVIDIA Jetson Orin Nano™ 8GB
 - CPU: 6-core Arm® Cortex®-A78AE v8.2 64-bit, 1.5MB L2 + 4MB L3
 - GPU: 1024-core NVIDIA® Ampere architecture with 32 Tensor Cores
 - Memory: 8GB 128-bit LPDDR5 102GB/s, 2133/3199MHz in frequency
 - AI performance: 67 TOPS in Super Mode
- OpenGL 4.6, OpenGL ES 3.2, CUDA® 11.4 and Vulkan 1.1
- 260-pin SO-DIMM form factor compatible with Orin™ NX
- NVIDIA JetPack™ 6.2

Storage

- 1 x M.2 Key M 2280 PCIe 3.0 x4 NVMe SSD, 128GB in default

Expansion Slot

- 1 x Full size Mini PCIe slot (PCIe 4.0 + USB 2.0)
- 1 x M.2 Key B 3042/3052 (USB 3.2) with 2 x micro-SIM slot

Display Interface

- 1 x HDMI® 2.0a/b, up to 3840x2160@30Hz

G-Sensor

- 3D accelerometer and 3D gyroscope, ST LSM6DSLTR

Remote Power Trigger

- ATX power button, wafer reserved

GbE

- 1 x GbE port, X-coded
 - 9Kbyte Jumbo frame
 - Controller: Intel® I210-IT

PoE+

- 4 x GbE PoE+ port, X-coded
 - IEEE 802.3af/at compliant
 - 30W (4-port) power budget in total
 - PoE on/off and power Watt monitoring
 - The cap is pre-installed

USB

- 2 x USB 3.2, Type-A
 - 5V@900mA each
 - up to 5Gbit/s link speed & compliance with USB 2.0 (LS/FS/HS link speed)
- 1 x OTG Micro-USB, 2 x USB 2.0 wafer-type (reserved)


Serial Port

- 1 x RS-232 (Tx, Rx, CTS, RTS)
- 1 x RS-232 (Tx, Rx)
- 1 x Console port (Tx, Rx)
- RS-232 working voltage $\pm 9V$, baud rate up to 115.2kb/s
- Connector: MULTI port (M12 A-coded)

DI/DO (reserved)

- 4-Bit input
 - Source: DC 9V~36V (12V@0.6mA/24V@1.2mA)
 - External: DC 0V~33V pull-high, high-level, DC 3.3V~33V; low-level, DC 0V~2V
- 4-Bit output
 - Source: DC 9V~36V (nominal 35mA@24V)
 - External: DC 5V~27V pull-high, sink current w/ 220mA for each bit, 500mA max (@25C)
- Source or external can be selected by software (default: source type)

Dimension Drawing

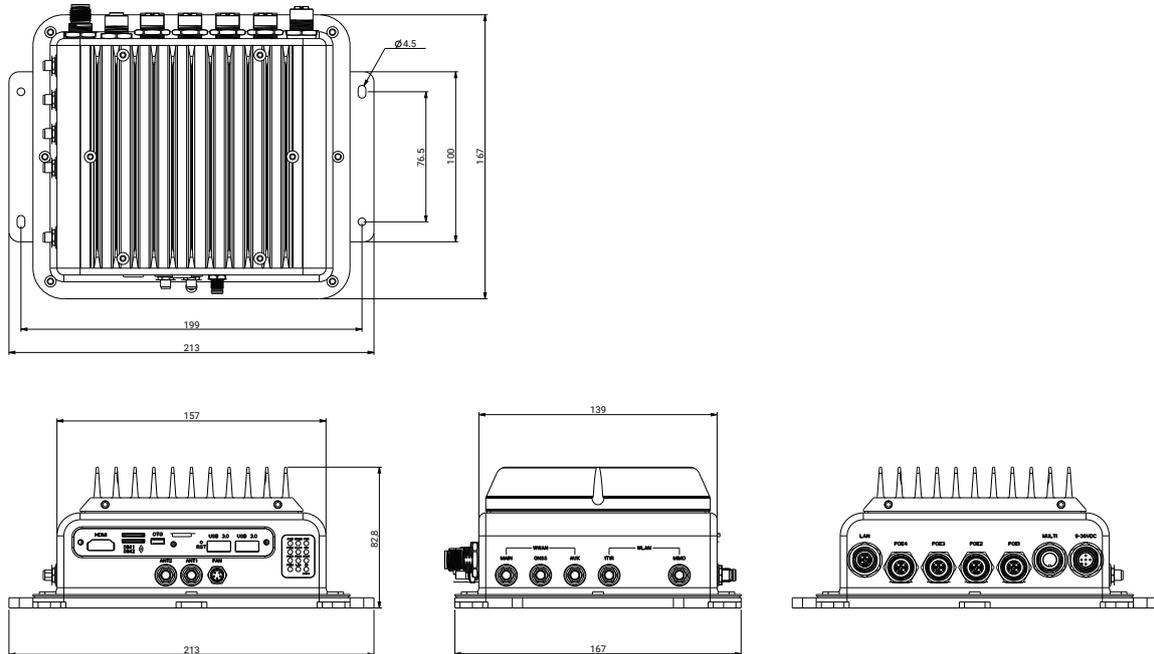

CAN bus

- 1 x CAN 2.0A/2.0B
- IEC 61000-4-2 Electrostatic Discharge (ESD): $\pm 4\text{KV}/8\text{KV}$ (contact/air, whole system)
- 2.5KV isolated
- Connector: MULTI port (M12 A-coded)

GPS

- u-blox NEO-M9N GNSS module for GPS/GLONASS/QZSS/Galileo/Beidou
- Optional DR (dead reckoning) function, NEO-M9V

Power Management

- Nominal voltage: DC 9V~36V
- Cranking voltage: 6V~9V (less than 20 sec)
- OCP & UVP (shut down once exceeding 37V)
- Ignition on/off control & programmable on/off delay timer
- Optional for remote power on/off trigger (wafer reserved)

I/O Interface Front

- 12 x LED indicator
- 1 x Reset button
- 1 x OTG
- 2 x micro-SIM slot, 1 x HDMI®, 2 x USB 3.2
- 2 x SMA antenna for LTE/5G module

I/O Interface Rear

- 9V~36V DC-in, A-coded
- 4 x GbE PoE & 1 x GbE, X-coded
- M12 MULTI port (2 x RS-232 & 1 x console, 1 x CAN)

I/O Interface Side

- 2 x PR-SMA antenna for Wi-Fi 5/6 module
- 2 x SMA antenna for LTE/5G module
- 1 x SMA antenna for GNSS

Mechanical

- Dimensions: 213.0mm (W) x 167.0mm (D) x 82.8mm (H)
- Weight: 2.1kg

Environment

- Operating temperature:
 - -25°C~60°C (fanless, in Super Mode, w/ 30W PoE)
 - -25°C~65°C (fanless, in Normal Mode, w/ 30W PoE)
- Storage temperature: -40°C~85°C
- Relative humidity: 10%~95% (non-condensing)

Vibration & Shock

- Vibration in operating
 - MIL-STD-810G, 514.6C, Procedure 3, Category 4
 - IEC 60068-2-64: 2.0g@5Hz~500Hz
 - MIL-STD-810G, 514.6E, Procedure 1, Category 24, 7.7g approx.

Shock

- Operating: MIL-STD-810G, Method 516.6, Procedure I, functional shock=20g
- Non-operating: MIL-STD-810G, Method 516.6, Procedure V, crash hazard shock test=75g

Certifications

- CE approval, FCC Class A, UKCA
- E13

Operating System

- NEXCOM Aided Linux (NAL) w/ Jetpack 6.2 integrated
 - NEXCOM custom functions (GNSS, 5G NR, 6-axis sensor, MCU control)
 - Ubuntu 22.04@Kernel 5.15

Accessories

- External cable:
 - Power extension cable, 20cm
 - M12 MULTI-port adapter cable, 20cm

Ordering Information

♦ ATC 3560-IP7-NA4C-8 (P/N: 10AT0356002X0)

- IP67 rating AI edge computer, NVIDIA Jetson Orin Nano™ 8GB, Super Mode, 128GB NVMe, 4 x PoE+, 1 x GbE, 2 x RS-232, 2 x USB 3.2, DC 9V~36V