



## Main Features

- Built-in NVIDIA® Jetson Orin Nano™ SOM, up to 67 INT8 Sparse TOPS AI performance in Super Mode
- The rugged, palm size, and fanless/fan kit design
- 4 x GbE PoE+ port (30W) for IP CAM/LiDAR sensors
- HEVC/H.265 hardware decode, supports up to 11 x 1080p30
- Wide range operating temperature of -25°C~60°C (fanless, in Super Mode)
- Ultra-speed PCIe 4.0 x4 NVMe SSD for data integrity
- Expandable for GNSS, LTE/5G NR & Wi-Fi 5/6
- DC 9V~36V input with ignition control & OCP/OVP
- NEXCOM Acceleration Linux (NAL) OS w/ JetPack 6.2 integrated
- Military standard of MIL-STD-810H for anti-vibration/shock
- CE/FCC, UKCA, and E-mark certified

## Product Overview

AI has become a vital part of autonomous vehicle technologies. Equipped with the high-performance NVIDIA® Jetson Orin Nano™ SOM, the ATC 3561-NA4C delivers up to 67 TOPS of AI inference performance (8GB version in Super Mode), making it ideal for applications such as Advanced Driver Assistance Systems (ADAS) in transportation and construction, Automatic Number Plate Recognition (ANPR), Autonomous Mobile Robots (AMR), Machine Learning (ML), Intelligent Transportation Systems (ITS), railway safety assurance, and factory automation.

Thanks to NEXCOM's advanced thermal design, the ATC 3561-NA4C can maintain up to 67 TOPS (fanless) even in harsh conditions, enabling consistent real-time AI inference. The ATC 3561-NA4C is purpose-built for in-vehicle and railway AI computing. It supports DC 9V to 36V/24V rail power with IGN control, and features four GbE PoE ports for long-distance IP cameras and LiDAR sensors. It also offers a wide range of I/O, including USB 3.2, isolated CAN bus, RS-232, console port, digital I/O (DI/DO), OTG, and HDMI®. With optional 5G NR and Wi-Fi 5/6 modules, the ATC 3561-NA4C can connect with CPS (Cyber-Physical Systems) for AI model retraining, enhancing inference precision in the field.

Built to endure tough conditions, the ATC 3561-NA4C supports an operating temperature range of -25°C to 60°C, and complies with MIL-STD-810H for resistance to shock and vibration. It is certified to CE/FCC Class A, UKCA, and E-mark standards.

## Specifications

### NVIDIA® Jetson Orin Nano™ SOM

- Jetson Orin Nano™ 8GB
  - CPU: 6-core Arm® Cortex®-A78AE v8.2 64-bit, 1.5MB L2 + 4MB L3
  - GPU: 1024-core NVIDIA® Ampere architecture with 32 Tensor Cores
  - Memory: 8GB 128-bit LPDDR5 102GB/s, 2133/3199MHz in frequency
  - AI performance: 40 INT8 TOPS, 67 TOPS in Super Mode
- OpenGL 4.6, OpenGL ES 3.2, CUDA® 11.4 and Vulkan 1.1
- 260-pin SO-DIMM form factor compatible with Orin™ NX
- NVIDIA® JetPack 6.2

### Storage/Boot Disk

- 1 x M.2 Key M 2242 PCIe 4.0 x4 NVMe SSD, 128GB in default

### Expansion

- 1 x M.2 Key E 2230 (PCIe 4.0 + USB 2.0)
- 1 x M.2 Key B 3042/3052 (USB 3.2/2.0) with 2 x nano-SIM slot

### Display

- 1 x HDMI® 2.0a/b, up to 3840x2160@60Hz

### G-Sensor

- 3D accelerometer and 3D gyroscope, ST LSM6DSLTR

### Remote Power Trigger

- ATX power button, wafer reserved

### PoE+

- 4 x 1GbE RJ45 port
  - 9K byte Jumbo frame, PTP (IEEE 1588) supported
  - Switching: Realtek RTL8367RBI-VH-CG-I
  - IEEE 802.11af/at PoE (30W power budget)
  - PSE on/off & Watt monitoring

### USB

- 2 x USB 3.2, Type-A
  - 5V@900mA each
  - up to 5Gbit/s link speed & compliance with USB 2.0 (LS/FS/HS link speed)
- 1 x OTG Micro-USB (w/ a door)
- 1 x USB 2.0, wafer reserved

### DI/DO

- 4-Bit input, non-isolation
  - Source: DC 9V~36V (12V@0.6mA/24V@1.2mA)
  - External: DC 0V~33V pull-high, high-level, DC 3.3V~33V; low-level, DC 0V~2V
- 4-Bit output, non-isolation
  - Source: DC 9V~36V (nominal 35mA@24V)
  - External: DC 5V~27V pull-high, sink current w/ 220mA for each bit, 500mA max (@25C)
- Source or external can be selected by software (default: source type)
- Connector: Multi-port (DB15)


### Serial Port

- 1 x COM Multi-port (DB15), supports RS-232 (Tx, Rx)
  - RS-232 working voltage  $\pm 9V$ , baud rate up to 115.2kb/s
- 1 x Console port (Tx, Rx), wafer reserved

### CAN bus

- 1 x CAN FD, compatible with CAN 2.0A/2.0B
  - IEC 61000-4-2 Electrostatic Discharge (ESD):  $\pm 4KV/8KV$  (contact/air, whole system)
  - Up to 5Mb/s in data transmit
  - 2.5KV isolated
  - Connector: Multi-port (DB15)

## Dimension Drawing

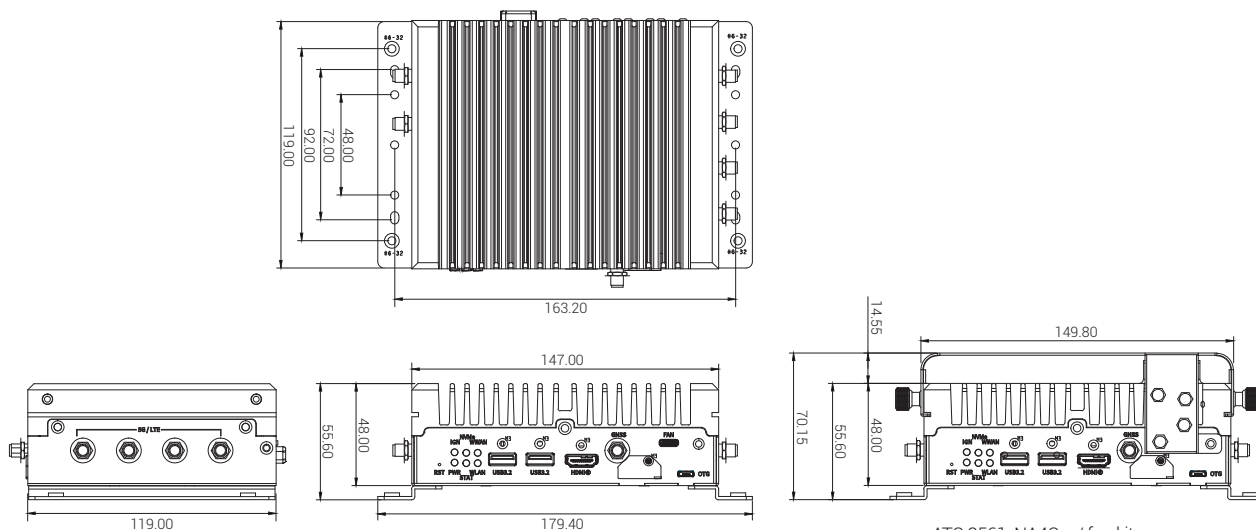

### GPS

- Onboard u-blox NEO-M9N GNSS module for GPS/Glonass/QZSS/Galileo/Beidou
- Optional NEO-M9V w/ DR (dead reckoning) function

### Power Supply

- Nominal voltage: DC 9V~36V
- Cranking voltage: DC 6V~9V (less than 20sec)
- OCP & UVP (shut down once exceeding 37V)
- Ignition on/off control & programmable on/off delay timer
- Optional for remote power on/off control

### I/O Ports, Front-Plate

- 6 x LED indicator
- 1 x Reset button
- 2 x nano-SIM slot, 1 x OTG
- 1 x HDMI®
- 2 x USB 3.2
- 1 x Multi-port (DB15)
- 1 x Antenna hole for GNSS (RP-SMA ant.)

### I/O Ports, Rear-Plate

- 9V~36V DC-in, terminal block
- 4 x 1GbE RJ45 PoE port

### I/O Ports, Side-Plate

- 4 x Antenna hole for LTE/5G module (SMA ant.)
- 2 x Antenna hole for Wi-Fi 5/6 module (PR-SMA ant.)

### Dimension & Weight

- Dimensions:
  - 179.4mm (W) x 119mm (D) x 55.6mm (H) (w/ mount bracket, fanless)
  - 179.4mm (W) x 119mm (D) x 70.1mm (H) (w/ mount bracket, w/ fan kit)
- Weight: 1.28kg (w/o fan kit)

### Environment

- Operating temperature:
  - 25°C~60°C (fanless in Super Mode)
  - 25°C~65°C (w/ fan kit in Super Mode)
  - 25°C~65°C (fanless in Normal Mode)
- Storage temperature: -40°C~85°C
- Relative humidity: 10%~95% (non-condensing)

### Vibration & Shock

- Vibration in operating
  - MIL-STD-810H, 514.8C, Procedure 6, Category 4
  - IEC 60068-2-64: 2.0g@5Hz~500Hz
  - MIL-STD-810G, 514.6E, Procedure 1, Category 24, 7.7g approx.

### Shock

- Operating: MIL-STD-810G, Method 516.6, Procedure I, functional shock=20g
- Non-operating: MIL-STD-810G, Method 516.6, Procedure V, crash hazard shock test=75g

### Certifications

- CE approval, FCC Class A, UKCA, E-mark

### Operating System

- NEXCOM Acceleration Linux (NAL) w/ Jetpack 6.2 integrated
  - NEXCOM custom functions (GNSS, 5G NR, 6-axis sensor, MCU control)
  - V4L2
  - Ubuntu 22.04@Kernel 5.15

### External Cable

- Multi-port adapter cable, 20cm

## Ordering Information

### ATC 3561-NA4C-8 (P/N: 10AT0356101X0)

Edge AI computer, NVIDIA® Jetson Orin Nano™ 8GB, Super Mode supported, 128GB NVMe, 4 x PoE+, 1 x RS-232, 2 x USB 3.2, DC 9V~36V input

### FAN kit (P/N: 10VK00FAN03X0)

Fan kit w/ 12V fan power cable