



Main Features

- Intel® Core™ processor dual core i7-4650U/i5-4300U/i3-4010U
- Three SIM cards + dual WWAN modules support
- Dual externally accessible SATA 3.0 SSD/HDD
- Built-in U-blox UBX-G6010 GPS, optional Dead Reckoning support
- Built-in CAN 2.0B. Optional OBDII function (SAE J1939/J1708)
- Wake on RTC/SMS via WWAN module
- Voice communication via WWAN module
- Compliant with MIL-STD-810G
- 4x mini-PCIe socket rich expansion capability

Product Overview

VTC 7200 features powerful new generation Intel® Core™ processor i7-4650U/i5-4300U/i3-4010U. Its CPU performance gives the users the ability to adapt to what they need in any telematics applications. Its Intel® HD graphics 5000 engine allows users to fully take advantage of VTC 7200 to achieve smooth, seamless and stunning graphic performance on 3 different video outputs (VGA, DP, LVDS). VTC 7200 is equipped with 2 externally accessible SSD/HDD trays; users can easily download or upload the data on other devices by just removing the storage devices from VTC 7200. By integrating the variety of I/O ports and 4x Mini-PCIe sockets expansibility, VTC 7200 is not only suitable for video surveillance application, but also can meet the demand for other telematics applications, such as infotainment, fleet management and dispatching system. With dual SIM cards support, VTC 7200 allows three SIM cards backup each other for a better connectivity quality by software. In addition, three SIM cards + dual WWAN modules architecture can increase the bandwidth for a faster data transfer speed. Not only data transmission, VTC 7200 also supports two-way voice communication. Equipped with intelligent power management, VTC 7200 can be waked on by ignition, RTC timer or SMS/Ring remotely.

Specifications

CPU

- Intel® Core™ processor dual core i7-4650U, 1.7GHz
- Intel® Core™ processor dual core i5-4300U, 1.9GHz
- Intel® Core™ processor dual core i3-4010U, 1.7GHz

Memory

- 2 channel 204-pin DDR3L SO-DIMM socket support 1333/1600MHz up to 16GB, default 2GB.

Storage

- 2 x 2.5" SATA 3.0 SSD/HDD (externally accessible), RAID 0,1 supported (optional lockable storage available)
- 1 x CFast (externally accessible)

Expansion

- 1 x full size Mini-PCIe socket (USB 2.0)
- 1 x full size Mini-PCIe socket (USB 2.0 + PCIe)
- 1 x full size Mini-PCIe socket (USB 2.0 + PCIe)
- 1 x half size Mini-PCIe socket (USB 2.0 + PCIe)

Function

- 1 x default U-blox UBX-G6010 GPS module (50-channel and GALIELO) or optional modules with Dead Reckoning or GLONASS support
- Built-in G-sensor


I/O Interface-Front

- 4 x LED for power, storage, WWAN, WLAN
- 2 x externally accessible SATA 3.0 SSD/HDD tray, RFID 0, 1 supported (optional lockable storage available)
- 1 x dual USB type A connector for USB 3.0 port + USB 2.0 port
- 2 x externally accessible SIM card socket (selectable)
- 1 x phone jack 3.5mm for 1 x Mic-In
- 1 x phone jack 3.5mm for 1 x Line-Out
- 1 x externally accessible CFast card socket with cover
- 1 x event button (trigger type)
- 1 x reset button
- 3 x antenna hole for WWAN/WLAN/BT

I/O Interface-Rear

- 1 x 9~36VDC input with ignition
- 1 x dual USB type A connector for USB 3.0 port + USB 2.0 port
- 2 x RJ45 10/100/1000 Fast Ethernet with LED
- 1 x phone jack 3.5mm for 1 x Mic-In
- 1 x phone jack 3.5mm for 1 x Line-Out with 1.5W output each
- 1 x DB-15 VGA. Resolution up to 2560 x 1600 @60Hz
- 1 x DP port. Resolution up to 2560 x 1600 @60Hz
- 2 x DB-9 RS-232

Dimension Drawing

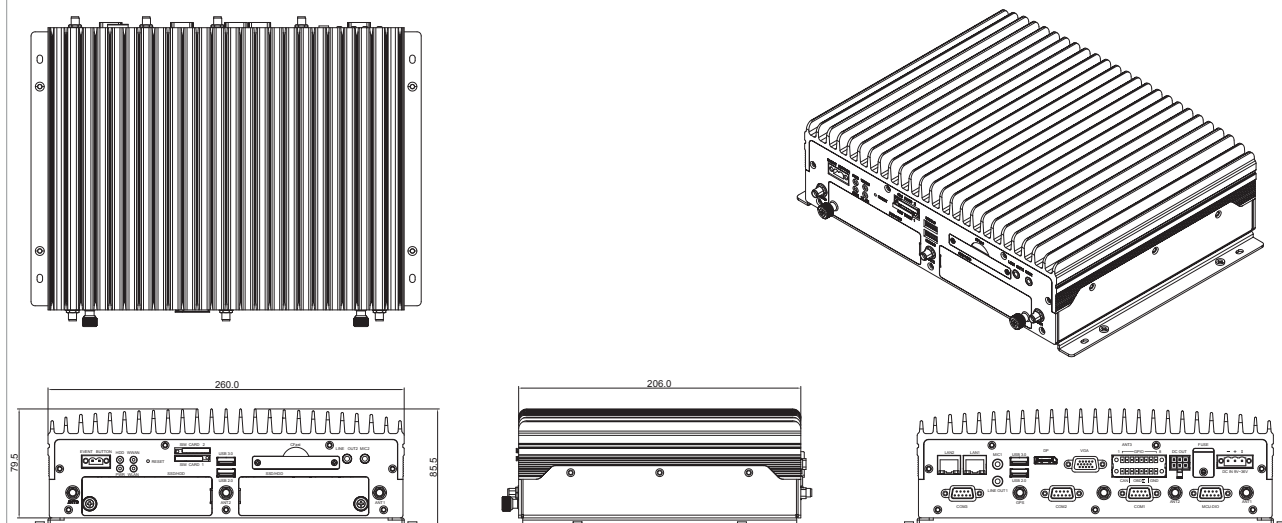

- 1 x DB-9 RS-232/422/485 (RI/5V/12V selectable)
- 1 x DB-9 for CAN 2.0B (optional CAN Bus 2.0B Mini-PCIe card), 2 x MCU-DI and 2 x MCU-DO
- 1 x 16-pin terminal block
- 1 x CAN Bus 2.0B (on board)
- 1 x optional OBDII module (ASE J1939 or J1708)
- 8 x Programmable GPIO
 - (Digital Input)
 - Input voltage (internal type): 5VDC TTL (default)
 - Input voltage (source type): 3~12VDC
 - (Digital Output)
 - Digital Output (sink type): 5VDC TTL (default), max current: 20mA
 - Digital Output (source type): 3~24VDC, max current: 150mA
- 1 x 12VDC output (2A), SM Bus
- 4 x antenna hole for WWAN/ WLAN/ BT/GPS
- 1 x Fuse (15A)

Power Management

- Selectable boot-up & shut-down voltage for low power protection by software
- Setting 8-level power on/off delay time by software
- Status of ignition and low voltage can be detected by software
- Support S3/S4 suspend mode

Operating System

- Windows 8, WES8
- Window 7, WES7
- Linux kernel 3.X

Dimensions

- 260 mm (W) x 206 mm (D) x 79.5 mm (H) (10.24" x 8.11" x 3.13")
- Weight: 2.5kg

Environment

- Operating temperatures : Ambient with air -30°C to 60°C
- Storage temperatures : -35°C to 85°C
- Relative humidity : 10% to 90% (non-condensing)
- Vibration (random) : 1.5g@5~500 Hz (in operation, HDD), 2g@5~500 Hz (in operation, SSD)

- Vibration (SSD/HDD) :
 - Operating : MIL-STD-810G, Method 514.6, Category 4, common carrier US highway truck vibration exposure
 - Storage : MIL-STD-810G, Method 514.6, Category 24, minimum integrity test
- Shock (SSD/HDD) :
 - Operating : MIL-STD-810G, Method 516.6, Procedure I, functional shock=20g
 - Non-operating : MIL-STD-810G, Method 516.6, Procedure V, crash hazard shock test=75g

Standards/Certifications

- CE approval
- FCC Class B
- E13 Mark

Ordering Information

- **VTC 7200-BK (P/N : 10V00720000X0)**
Intel® Core™ processor i3-4010U, 1.7 GHz dual core CPU, 2GB DDR3L SO-DIMM, VGA/DP output, 2 LAN, 2 x RS-232, 1 x RS-232/422/485, 8 x GPIO, 3 x USB, 12VDC output
- **VTC 7210-BK (P/N : 10V00721000X0)**
Intel® Core™ processor i5-4300U, 1.9 GHz dual core CPU, 2GB DDR3L SO-DIMM, VGA/DP output, 2 LAN, 2 x RS-232, 1 x RS-232/422/485, 8 x GPIO, 3 x USB, 12VDC output
- **VTC 7220-BK (P/N : 10V00722000X0)**
Intel® Core™ processor i7-4650U, 1.7GHz, dual core CPU, 2GB DDR3L SO-DIMM, VGA/DP output, 2 LAN, 2 x RS-232, 1 x RS-232/422/485, 8 x GPIO, 3 x USB, 12VDC output