

# TPPD 2200

21.5" In-Transit Display with CAT5 Interfaces



## Main Features

- ♦ 21.5" full-HD TFT LCD panel
- ♦ Wide range DC input from 9~36V
- ♦ Front bezel compliant with IP54
- ♦ Tempered glass
- ♦ Supports Video over IP technology (Daisy Chain)

## Product Overview

TPPD 2200 is 21.5" 16:9 LCD with resolutions up to 1920 x 1080 (Full HD) industrial displays. It is a Video over IP Receiver; it also a Video over IP Extender. VESA mount Kit (Optional) designs for easy installation almost any location, including retail outlets, supermarkets, train station, airports and Bus. It is compliant to in-vehicle industrial standard, like E/e-Mark.

Support Daisy chain HDMI/VGA over IP technology, it let multimedia signal easy to use one CAT5E cable to extend TV display Up to 60M or longer distance. It can be maximum connected to eight display, but also to signal for a longer extension, the whole system more flexible.

## Specifications

### LCD Panel

- ♦ LCD size: 21.5", 16:9
- ♦ Resolution: full HD, 1920 x 1080
- ♦ Luminance: 500 cd/m<sup>2</sup>
- ♦ Contrast ratio: 3000
- ♦ LCD color: 16.7M
- ♦ Viewing angle: 89 (U), 89 (D), 89 (L), 89 (R)
- ♦ Backlight: LED

### I/O Interface

- ♦ 1 x 9~36V, 3-pin (Power, Ignition, Ground)
- ♦ 1 x Video over Cat5 Receiver Input
- ♦ 1 x Video over Cat5 Extender Output

### Environment

- ♦ Operating temperature: -10°C to 40°C
- ♦ Storage temperature: -20°C to 60°C
- ♦ Humidity: 10 to 90% (non-condensing)


### Certification

- ♦ CE
- ♦ FCC
- ♦ E/e-Mark

### Mechanical

- ♦ Color: Pantone Black C
- ♦ Enclosure: Aluminum and Iron
- ♦ Mounting: support VESA75/100/200mm
- ♦ Ingress protection: Front bezel IP54
- ♦ Dimension: 528.46mm x 323.06mm x 58mm
- ♦ Weight: 7kg

## Dimension Drawing

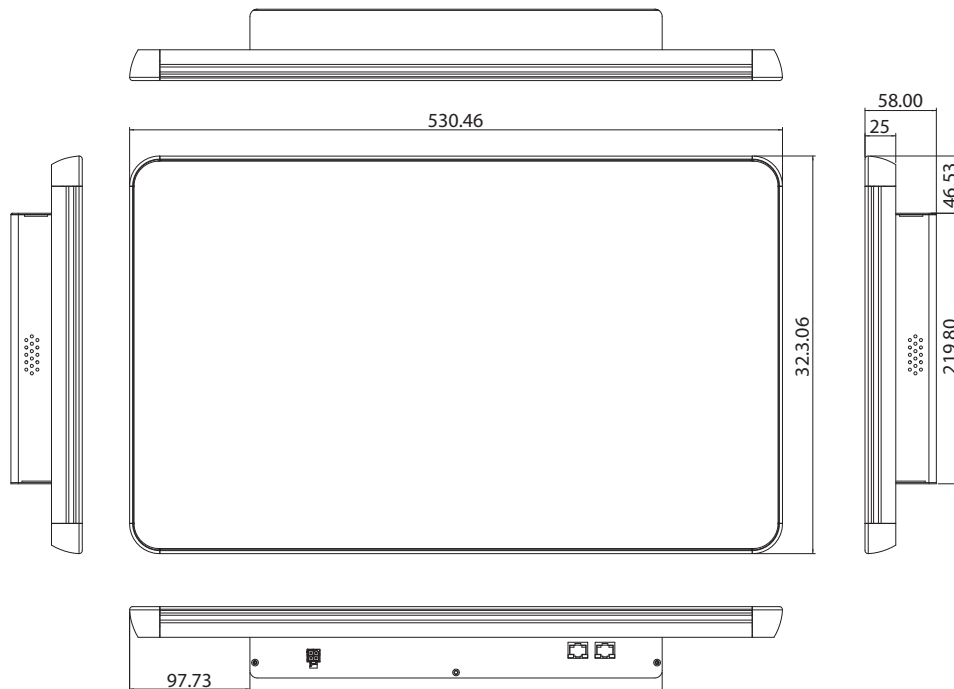

## Ordering Information

- ♦ TPPD 2200 (P/N: TBD)