



Main Features

- Onboard 3rd generation Intel® Core™ i7 BGA processor
- Mobile Intel® QM77 PCH
- Support 1 x 2.5" SATA HDD or 2 x SATA DOM
- 2 x Display port; 1 x VGA; 1 x DVI-D; 2 x USB 3.0; 2 x USB 2.0
- 4 x Intel® 82574IT GbE LAN ports; support WoL, teaming and PXE
- 2 x DB9 for RS232/422/485; 1 x DB44 Serial Port for 4 x RS232
- 1 x internal mini-PCIe socket supports optional Wi-Fi or 3.5G module
- 1 x CFast socket; 1 x SIM card socket
- Support +24VDC input; support ATX power mode
- TUV/RH certificate: EN60601-1:2006 (valid till:2017/12/31)

Product Overview

Compliant with TUV/RH Certificate: EN60601-1:2006, NISE 3640M series designed specifically for medical applications in hospital, clinics, or any medical environments. This fanless system integrated with 3rd generation Intel® Core™ i7 with QM77 PCH platform and brings great processing power to all medical equipments.

With 4x Intel® 82574IT GbE LAN controllers which can support up to 4 cameras and better throughput; besides, NISE 3640M series also supports WoL, LAN Teaming and PXE function. With computing and graphic performance enhancement, NISE 3640M series support 3 independent display and deliver a level of performance ideal for image and vision measurement on traffic control, overspeed monitoring, real time update and ePlice. More, NISE 3640M series support 2x RS232/422/485, 4x RS232, 2x USB 3.0, 2x USB 2.0, 1x CFast socket, 1x SIM card socket, and 1x internal mini-PCIe socket supports optional Wi-Fi or 3.5G module.

Leveraging a reliable fanless, durable cable-free design and wide operating temperature, NISE 3640M series can be exhibited in harsh environments, where severe temperature variation and vibration may exist.

Specifications

CPU Support

- Onboard 3rd generation Intel® Core™ i7 BGA processor
Core™ i7-3517UE, Dual Core, 1.7GHz, 4M Cache, Max Turbo Frequency 2.8 GHz
- Mobile Intel® QM77 PCH
- Turbo-boost disabled by default

Main Memory

- Onboard 2x DDR3/DDR3L SO-DIMM, supports up to 8GB DDR3/DDR3L 1333/1600 SDRAM, with un-buffered and non-ECC
- Pre-install 4G industrial grade memory as the manufacture configuration for shipment

Display Option

- Three independent display
(only support on 3rd generation processor)
 - Two display port and 1x VGA
 - Two display port and 1x DVI-D
- Dual independent display
 - VGA and DVI-D
 - Display port and VGA


I/O Interface-Front

- ATX power on/off switch
- HDD access/power status/LAN status LEDs
- 2 x USB 3.0 (blue color)
- 2 x USB 2.0
- 2 x Display port (can be converted to DVI-D or HDMI via active cables)
- 1 x CFast socket
- 1 x SIM card socket
- 2 x Antenna holes

I/O Interface-Rear

- 2 x DB9 for RS232/422/485
- 1 x DB44 for 4 x RS232
- 4 x Intel® 82574IT GbE LAN ports; support WoL, teaming and PXE
- 1 x VGA and 1 x DVI-D
- 1 x Potential equalization connector (M6 type)
- 1 x Line-out and 1x Mic-in
- 2-pin remote power on/off switch
- +24VDC input

Dimension Drawing

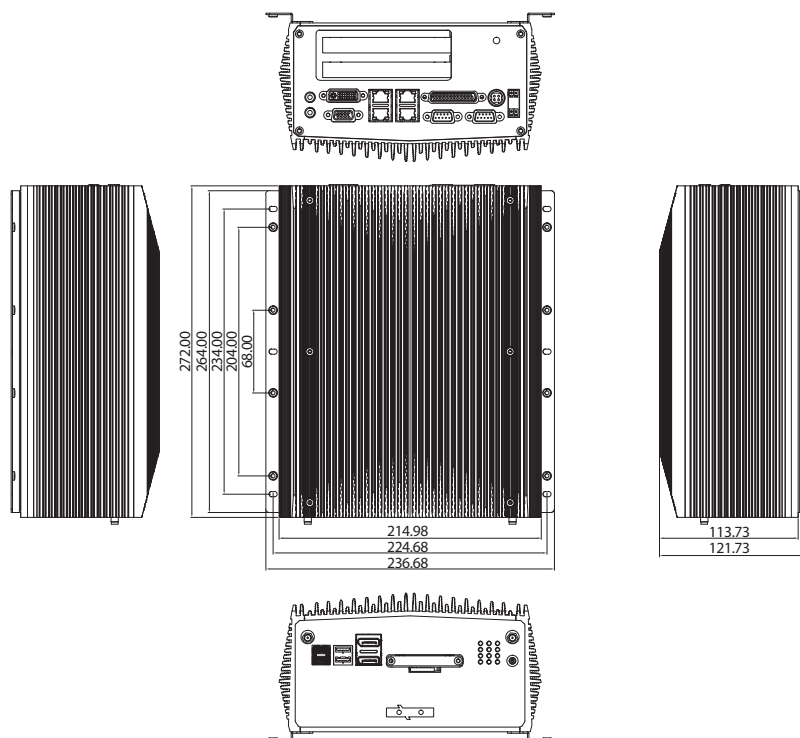

Storage Device

- 1x 2.5" SATA HDD or 2x SATA DOM (support 90°C horizontal type only)
- 1x CFast socket

Expansion Slot

- NISE 3640ME2: two PCIe x4 expansion
 - Add-on card length: one 169mm max. and one 240mm max.
 - Power consumption: 10W/slot max.
- NISE 3640M2: two PCI expansion
 - Add-on card length: one 169mm max. and one 240mm max.
 - Power consumption: 10W/slot max.
- NISE 3640M2E: one PCI expansion and one PCIe x4 expansion
 - Add-on card length: 169mm max. for PCIe x4 and 240mm max. for PCI expansion
 - Power consumption: 10W/slot max.
- 2 x mini-PCle sockets (top side mini-PCle socket support optional Wi-Fi or 3.5G module)

Power Requirements

- ATX power mode
- Support +24VDC input
- Optional medical AC/DC power adapter

Dimensions

- 215mm (W) x 272mm (D) x 114mm (H) without wall mount bracket (8.5" x 10.7" x 4.5")

Construction

- Aluminum Chassis with fanless design

Environment

- Operating temperature: Ambient with air flow: -20°C to 45°C (according to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -30°C to 85°C
- Operating humidity: - 10% to 90% relative humidity, non-condensing Limits to be at 90% RH at max 40C

- Shock protection:
 - HDD: 20G, half sine, 11ms, IEC60068-2-27
 - CFast: 50G, half sine, 11ms, IEC60068-2-27
- Vibration protection w/ HDD condition
 - Random: 0.5Grms @ 5~500Hz according to IEC60068-2-64
 - Sinusoidal: 0.5Grms @ 5~500Hz according to IEC60068-2-6

Certifications

- CE/FCC Class B
- TUV/RH certificate: EN60601-1:2006 (valid till:2017/12/31)

OS Support Lists

- Windows XP 32-bit and 64-bit
- Windows 7 32-bit and 64-bit
- Windows 8.1 32-bit and 64-bit

Ordering Information

Barebone

- **NISE 3640M (P/N: 10J00364006X0)**
3rd generation Intel® Core™ i7 fanless system with one PCIe x4 expansion
- **NISE 3640M2 (P/N: 10J00364008X0)**
3rd generation Intel® Core™ i7 fanless system with two PCI expansion
- **NISE 3640M2E (P/N: 10J00364009X0)**
3rd generation Intel® Core™ i7 fanless system with one PCIe x4 expansion and one PCI expansion
- **NISE 3640ME2 (P/N: 10J00364007X0)**
3rd generation Intel® Core™ i7 fanless system with two PCIe x4 expansion
- **Optional medical AC/DC power adapter**
SINPRO HPU101-108 24V/4.16A w/ EN60601-1 (P/N: 7400100006X00)