

# NISE 3600CE2/P2/P2E

9/8/7/6th Gen Intel® Core™ i7/i5/i3

Fanless System with Expansion



## Main Features

- Support 9/8/7/6th Gen Intel® Core™ i7/i5/i3 socket type processor
- Intel® H310C PCH
- Support 1 x 2.5" SATA HDD/SSD
- 1 x VGA, 1 x HDMI® and 2 x display port with independent display support
- Dual Intel® GbE LAN ports; support WoL, teaming and PXE
- 4 x USB 3.2, 2 x USB 2.0, 5 x RS-232 and 1 x RS-232/422/485
- 2 x Internal Mini PCIe socket support optional Wi-Fi or 4G module
- 1 x External M.2 3042 Key B & 2 x mSATA
- 1 x SIM card socket
- Support +12V to 30V DC input; support ATX power mode
- Two PCI or PCIe x4 expansion (only support PCIe x1 signal) expansion
- Support Windows 11/10/7

## Product Overview

Integrated with 6/7/8/9th Gen Intel® Core™ i7/i5/i3 and H310C PCH platform, NISE series evolve to a new generation called NISE 3600C series. It is not only sustained its good reputation on quality and user friendly features but also innovated its mechanical design.

With computing and graphic performance enhancement, NISE 3600C series supports 2 x display port, 1 x VGA port and 1 x HDMI port to fulfill the graphic intensive or computing oriented applications, including auto optical Inspection, machinery automation, ePolice infotainment, surveillance or image processing equipment and healthcare industry. In addition, NISE 3600C series offers 4 x USB 3.2 and 2 x USB 2.0, greater expansion capability with 2 x Intel® GbE LAN ports, 6 x COM ports, and 1 x M.2 3042 Key B socket for front accessible availability. NISE 3600C series is sufficient to support wide range of DC input from +12 to 30V and ATX power; it is a new generation to meet most application requirements.

## Specifications

### CPU Support

- Support 9/8/7/6th Gen Intel® Core™ i7/i5/i3 socket type processor

### Main Memory

- 2 x DDR4 2133/2400/2666 SO-DIMM, supports up to 32GB

### Display Option

- Dual independent display
  - VGA and HDMI®
  - Display port and VGA
  - Display port and HDMI®
  - Display port and display port

### I/O Interface-Front

- ATX power on/off switch
- HDD access/power status LEDs
- 2 x USB 3.2 port
- 2 x Display port (can be converted to DVI-D or HDMI via active cables)
- 4 x Antenna hole
- 1 x External M.2 3042 Key B (PCIe x1, USB 2.0)
- 1 x SIM card socket (for mini card 2)


### I/O Interface-Rear

- 1 x DB44 serial port for 4 x COM port
  - COM1/3/4 (RS-232)
  - COM2 (RS-232/422/485)
- 2 x DB9 for COM5 (RS-232) & COM6 (RS-232)
- 2 x USB 3.2 port (900mA per port)
- 2 x USB 2.0 port (500mA per port)
- 1 x VGA port
- 1 x HDMI® port
- 2 x Intel® I210-AT GbE LAN ports; support WoL, teaming and PXE
- 1 x MIC-in and 1 x Line-out
- 1 x 4-pin remote power on/off switch
- +12V to 30V DC input

### Storage Device

- 1 x 2.5" HDD/SSD
- 1 x M.2 3042 Key B
- 2 x mSATA, supports mPCIe NVRAM module

## Dimension Drawing

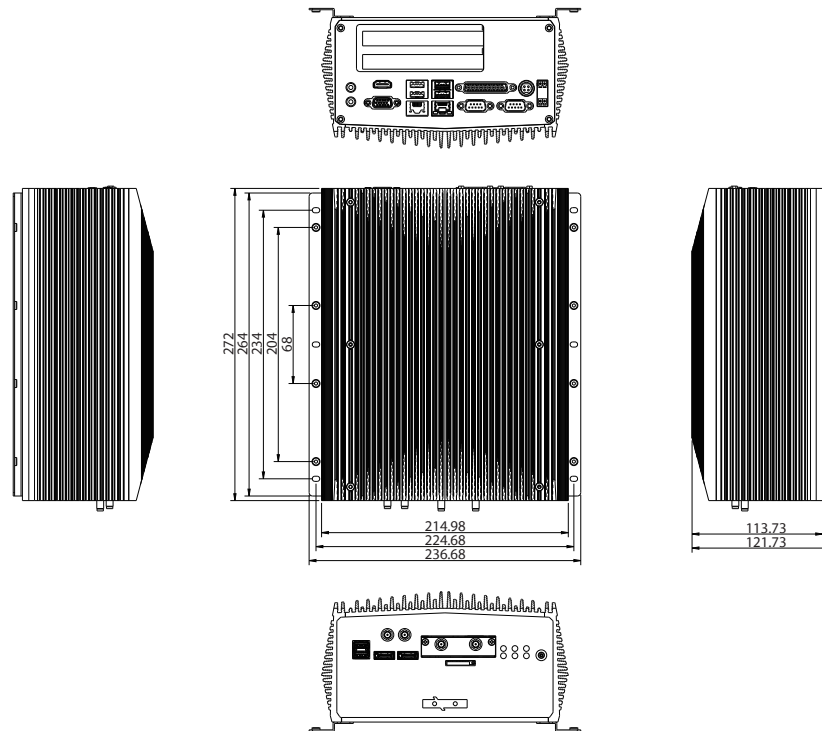

### Expansion Slot

- 2 x Internal mini-PCIe socket support optional Wi-Fi/4G LTE
- NISE 3600CE2: two PCIe x4 expansion slot (only support PCIe 1x signal)
  - Add-on card length: 169mm max. and one 240mm max.
  - Power consumption: 10W/slot max
- NISE 3600CP2: two PCI expansion slot
  - Add-on card length: 169mm max. and one 240mm max.
  - Power consumption: 10W/slot max

### Power Requirements

- AT/ATX power mode (default: ATX power mode)
- Power input: +12 to +30V DC
- Power adapter: optional AC to DC power adapter (24V DC, 120W)

### Dimensions

- 215 mm(W) x 272mm (D) x 114mm (H) without wall mount bracket (8.5" x 10.7" x 4.5")

### Construction

- Aluminum and metal chassis with fanless design

### Environment

- Operating temperature:
  - Ambient with air flow: -5°C~60°
  - (according to IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14)
  - \* Industrial grade. memory, storage, and peripherals are required under 60C operating temp.
- Storage temperature: -20°C~0°C
- Relative humidity: 10%~95% (non-condensing)
- Shock protection:- HDD: 20G, half sine, 11ms, IEC 60068-2-27- M.2: 50G, half sine, 11ms, IEC 60068-2-27
- Vibration protection with HDD condition:
  - Random: 0.5Grms@5~500Hz, IEC 60068-2-64
  - Sinusoidal: 0.5Grms@5~500Hz, IEC 60068-2-6
- Vibration protection with SSD&M.2 condition:
  - Random: 2Grms@5~500Hz, IEC 60068-2-64
  - Sinusoidal: 2Grms@5~500Hz, IEC 60068-2-6

### Certifications

- CE approval - EN 61000-6-2- EN 61000-6-4
- FCC Class A
- UKCA

### OS Support

- Windows 11 IoT Enterprise
- Windows10 64-bit
- Windows 7

### Weight Information

- Gross weight: 6.54kg
- Net weight: 5kg

## Ordering Information

### Barebone

- **NISE 3600CE2 (P/N: 10J03600C03XE)**  
9/8/7/6th Gen Intel® Core™ i7/i5/i3 fanless system with two PCIe x4 expansion (only PCIe x1 signal)
- **NISE 3600CP2 (P/N: 10J03600C02XE)**  
9/8/7/6th Gen Intel® Core™ i7/i5/i3 fanless system with two PCI expansion
- **NISE 3600CP2E (P/N: 10J03600C04XE)**  
9/8/7/6th Gen Intel® Core™ i7/i5/i3 fanless system with one PCI and one PCI x4 (only PCIe x1 signal) expansion
- **19V, 120W AC to DC power adapter w/o power cord (P/N: 7400120027X00)**