

IPPC 1850P

18.5" TFT HD 16:9 Heavy Industrial Panel PC
with Intel® Celeron® J3455 Processor, 1.50GHz
Multi-Touch Screen, 4GB DDR3L, 4 x USB, 3 x COM



Main Features

- Intel® Celeron® J3455 processors , 1.50GHz
- Metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap multi-touch with zero bezel flush front design
- Dual GbE/Dual DisplayPort/Dual USB 3.0 & USB 2.0
- 1 x mini-PCIe sockets, 1 x M.2, 1 x RS232/422/485
- DDR3L 4GB/2.5" HDD bracket
- IP66 compliant front panel
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- DC power input 24VDC

Product Overview

The 18.5" fanless panel PC IPPC 1850P incorporating an industrial motherboard is intended for versatile industrial applications. The panel PC has a touch screen LED backlight LCD panel with 1366 x 768 (FWXGA) resolution. The front panel which adopts flush design and complies with IP66 standard makes it the perfect fit in industrial applications.

The IPPC 1850P supports WLAN expansion and others via dual Gigabit Ethernet connectors, one mini-PCIe slot and one M.2 slot. With support for DC power input of 24VDC, IPPC 1850P can gain a strong foothold in industrial field and machine devices. In addition, IPPC 1850P can hook 2nd display via a DisplayPort for dual independent display. IPPC 1850P has one adjustable RS232/422/485 ports.

Specifications

Panel

- LCD size: 18.5", 16:9
- Resolution: FWXGA 1366 x 768
- Luminance: 400cd/m2
- Contrast ratio: 1000
- LCD color: 16.7M
- Viewing angle: 80(U), 80(D), 85(L), 85(R)
- Backlight: LED

Touch

- Ten points P-Cap (projected capacitive touch)
- Touch light transmission: 87%
- Anti-scratch surface: 7H hardness
- Touch interface: USB

System

- CPU: onboard Intel® Celeron® J3455 Quad Core processor, 1.50GHz
- BIOS: AMI BIOS
- System memory: 1 x 204-pin DDR3L SO-DIMM socket, 4GB DDR3L (default), support up to 8GB DDR3L-1866, non-ECC and un-buffered

Storage device:

- 1 x Internal M.2 2242
- 1 x Hard drive bay: optional 1 x 2.5" SATA HDD
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- Expansion: 1 x mini-PCIe sockets (support optional Wi-Fi module)
- Front LED indicator to show operating status


Rear I/O

- Ethernet: 2 x RJ45
- Display: 2 x DP1.2
- USB: 2 x USB 2.0, 2 x USB 3.0
- LED indicator: Power/HDD/ GPIO programmable LED
- Power button
- COM #3: RS232/422/485
- COM #1&2: RS232

Ethernet

- LAN chip: dual Intel® I210-IT Gigabit LAN
- Ethernet interface: 10/100/1000 based-Tx Ethernet compatible

Dimension Drawing

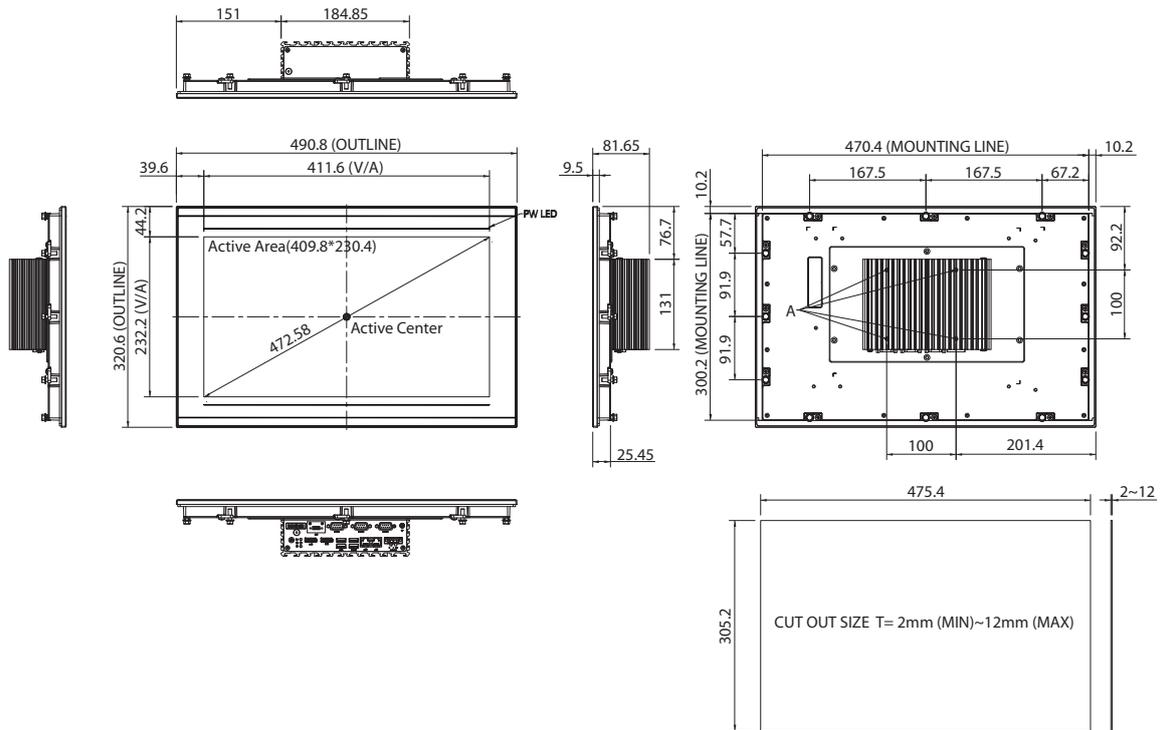

Mechanical & Environment

- Color: Pantone black silver front bezel
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- System with panel mounting kit w/o panel mounting hole
- Power:
 - Power input: 24 VDC
 - Power adapter: optional AC to DC power adapter (+24V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Temperature:
 - Operating temperature: 0°C to 50°C
 - Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 490.8 x 320.6 x 81.65 mm
- Weight: 8.1 kg

Certifications

- CE (including EN61000-6-2/EN61000-6-4)
- FCC class A

OS Support Lists

- Windows 10 64-bit

Ordering Information

Barebone

- **IPPC1850P (P/N: 10I1850P00X0)**
18.5" HD LED backlight touch panel PC, Intel® Celeron® J3455, Quad Core Processor, 1.50GHz, touch screen, 4GB DDR3L, 1 x RS232/422/485

Options

- **24V, 60W AC/DC power adapter w/o power cord (P/N: 7400060047X00)**