


# NDiS S538

Embedded Computer Powered by 6th Gen. Intel® Core™ Processor  
Intel® SDM-L Based Digital Signage Platform, Support 4K Resolution

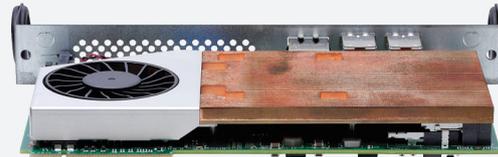

## Main Features

- Intel® Smart Display Module Large (Intel® SDM-L) design in
- 6th generation Intel® Core™ Skylake processor
- Intel® integrated HD 530 graphic engine
- Support 3 independent 4K2K video out
- Dual DDR4 SO-DIMM support
- Support Wi-Fi module

## Product Overview

NDiS S538 is designed for thinner and power efficiency display. There is no housing to limit display size and also easily integrate in signage player. NDiS S538 can be spanned from Celeron to Core™ processor and support All-in-One signage, interactive media player, and video wall. Also, allowing for easy storage capacity expansion through pluggable M.2 storage unit.

In addition, NDiS S538 leverages the 6th gen. Intel® Core™ processors to deliver outstanding graphics support 3 independent 4K2K video output. The superb but power-efficient can therefore maximize visual impacts for digital signage applications.

## Specifications

### CPU Support

- 6th generation Intel® Core™ processor (LGA1151), 35W

### Chipset

- Intel® Q170 PCH

### Graphic

- Intel® integrated HD 530 graphics

### Main Memory

- 2 x 260-pin SO-DIMM Sockets, Supports DDR4 2133/2400 MHz non-ECC, un-buffered memory up to 32G (Single socket max. 16GB)

### I/O Interface-Front

- 1 x Power button with LED
- 1 x Reset button
- 1 x RJ45 with LEDs for Gigabit LAN
- 1 x Mini DP ++
- 4 x USB 3.0
- 2 x Antenna hole

### I/O Interface-Rear (PCIe x8)

- 1 x HDMI1.4 signal
- 1 x DP1.2 signal
- 2 x I2C, master and slave ports signal
- 1 x CSPI signal
- 1 x PCIe by 1 signal
- System management

### Storage Device

- 1 x M.2 2280, PCIe x4 + SATA

### Expansion

- 1 x M.2 2230 For optional Wi-Fi module

### Dimensions

- 175mm (W) x 100mm (D) x 20mm (H)

### Power Power Supply

- DC power input +12V

### Environment

- Operating temperature: ambient with air flow from 0°C to 55°C
- Storage temperature: -10°C to 70°C
- Humidity: 95% (non-condensing)


### Certification

- CE/FCC Class A

### Operating System

- Win10 64-bit/Linux

## Dimension Drawing

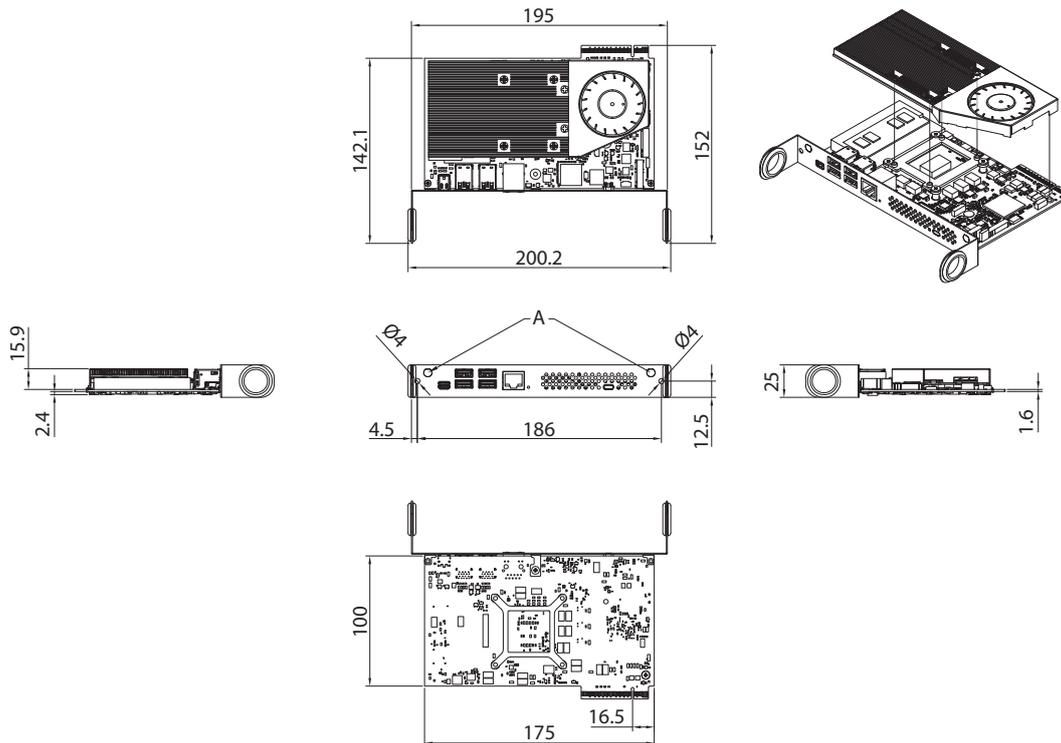

## Ordering Information

- ◆ **NDiS S538 (P/N: 10W00S53800X0)**  
Intel® Smart Display Module Large (Intel® SDM-L), 6th gen. Intel® Core™ LGA1151 type processor, Intel® Q170 chipset